

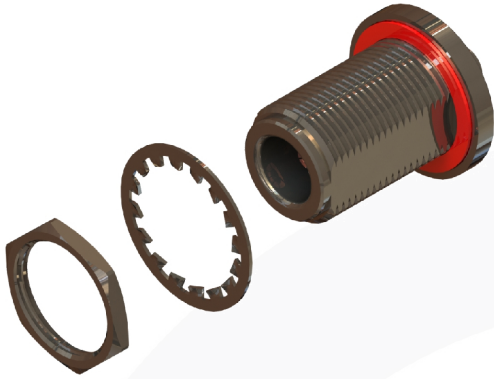


## N TYPE B/H JACK TO U.FL RECEPTACLE ADAPTOR


### 74-2549-501-H3

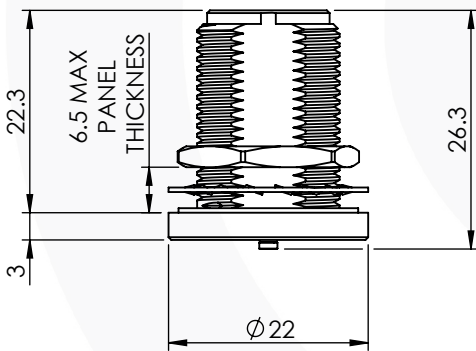

images for illustration purposes only

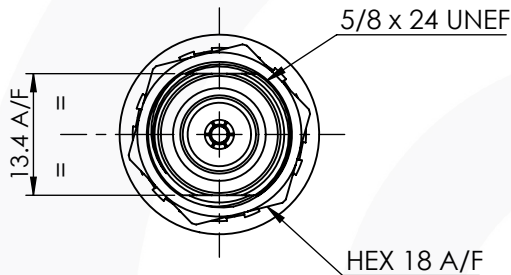

### RECOMMENDED MOUNTING:

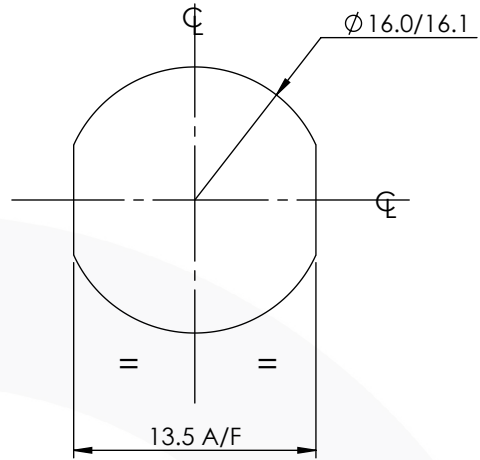

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Mated): IP 68

### Electrical Specification


Impedance: 50 Ohm  
Frequency: 0-10 GHz  
Dielectric W/V: 200 Veff  
Insulation res: 500 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min  
Cable Retention: Not Applicable  
Mating cycles: 50  
Weight: 33.85 g

### Connector Interface

image for illustration purposes only

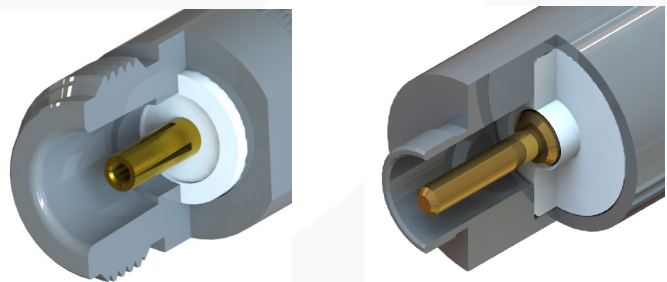

7	LOCK WASHERS	STAINLESS STEEL	PASSIVATED
6	HERMETIC SEAL	EPOXY	N/A
5	GASKET	SILICONE	N/A
4	NUT	STAINLESS STEEL	PASSIVATED
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	28-Mar-18
		CHK'D	I.G.	28-Mar-18
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX, TW1 4JR</b> <small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				