

PRODUCT DATASHEET


MICROVIDEO PLUG TO DIN 1.0/2.3 JACK ADAPTOR

74-5279-511-D126



images for illustration purposes onl

2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCITION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

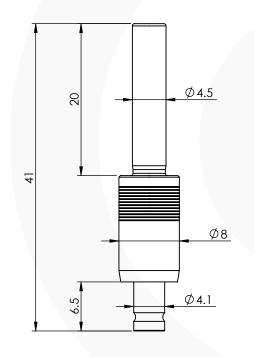

3	INSULATOR		PTFE		N/A		
2	CENTRE CONTACT		BERYLLIUM COPPER		GOLD		
1	BODY		PHOSPHOR BRONZE		GOLD		
ITEM	DESCRIPTION		MATE	MATERIAL		PLATING	
Α4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES				
REVISION: A01			NAME	SIGN	SIGNATURE DA		
-		DRAWN	P.P.			17/09/2019	
ISSUE	: 1	CHK'D	G.E.			24/09/2019	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'E)				
		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR					

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm Frequency: 0-12 GHz Dielectric W/V: 750 Veff Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 20 N min

Cable Retention: N/A Mating cycles: 500 Weight: 5.91 g

Connector Interface





Tel: +44(0)20 8538 9090

TW1 4JR

Fax: +44(0)20 8538 9890

Email: info@coax-connectors.com