


PRODUCT DATASHEET

MICROVIDEO PLUG TO MICRO BNC JACK ADAPTOR

74-6779-511-D126



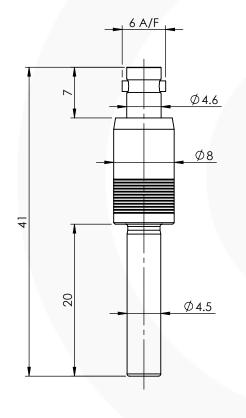

| 3 | INSULATOR | | PTFE | | N/A | |
|---|----------------|---|-------------------------------|-----------|------|----------|
| 2 | CENTRE CONTACT | | BeCu | | GOLD | |
| 1 | BODY | | BRASS | | GOLD | |
| ITEM | DESCRIPTION | | MATER | IAL PL | | TING |
| Α4 | SHEET 1 OF 1 | | DIMENSIONS ARE IN MILLIMETRES | | | |
| REVISION: A03 | | | NAME | SIGNATURE | | DATE |
| | | DRAWN | P.P. | | | 16/08/19 |
| ISSUE | 1 c | CHK'D | G.E. | | | 29/08/19 |
| 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR | | APPV'D | | | | |
| | | THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR | | | | |

Environmental Specification


Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 75 Ohm Contact Retention: 20N Frequency: 0-12 GHz Cable Retention: N/A Dielectric W/V: 750 Veff Mating cycles: 500 Insulation res: 5000 M-Ohm Weight: 6.04 g

Connector Interface





Mechanical Specification

Tel: +44(0)20 8538 9090

2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LID. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com