




## MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK 2 WAY 92-67-468-2-B126

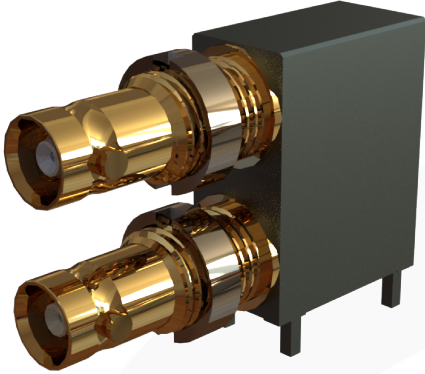

images for illustration purposes only

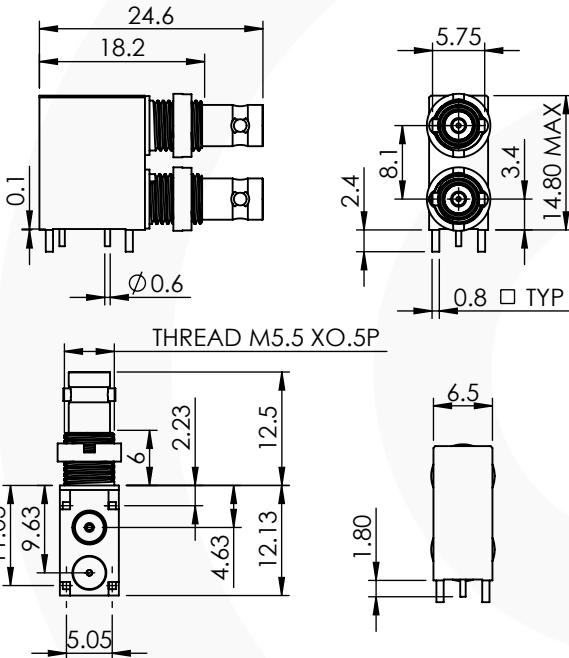

### Recommended PCB Layout

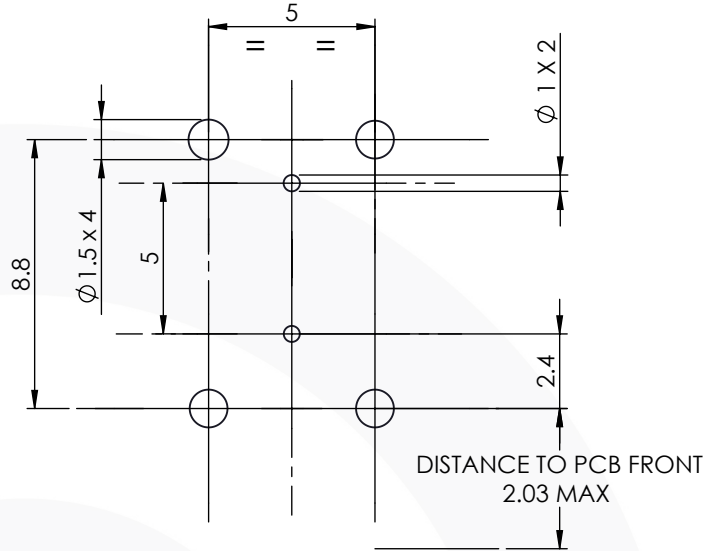

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

### Electrical Specification Mechanical Specification

Impedance: 75 Ohm

Contact Retention: 20 N min

Frequency: 0-6 GHz

Cable Retention: Not Applicable

Dielectric W/V: 1000 Veff


Mating cycles: 500

Insulation res: 10000 M-Ohm


Weight: 10.80 g

### Connector Interface

image for illustration purposes only



### Recommended Mounting Hole

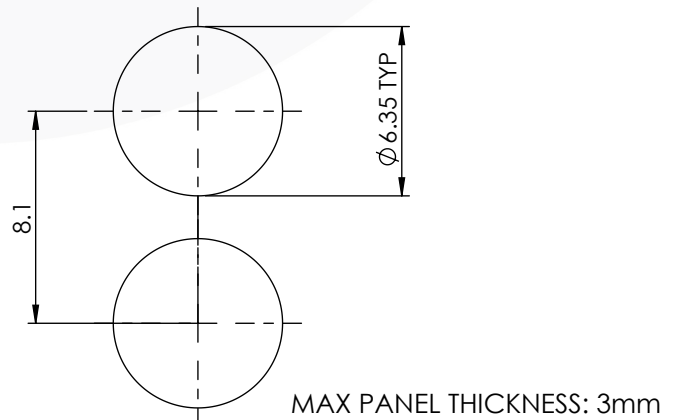

5	REAR BODY	BRASS	TIN
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	FRONT BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	C02	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	21/09/2016
		CHK'D	GE	22/09/2016
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				