


## TNC STRAIGHT EASIFIT / CRIMP PLUG 50 OHM ( ANTI-PISTONING ) 13-018-Q3-D0



images for illustration purposes only


HEATSHRINK SUPPLIED BUT NOT SHOWN

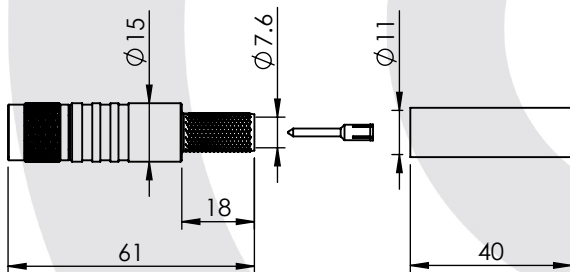

### Suitable for Cables:

SENSTAR RIGID LMR400

### Stripping Dimensions



- a = 5.0 mm
- b = 17.0 mm
- c = 57.0 mm
- d = 27.0 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure: AP021

### Tooling

- Centre Contact: Not Applicable      Tool No: Not Applicable
- Crimp Sleeve: Hex 10.9mm A/F      Tool No: 336K
- Alignment Tool: Not Applicable      Extraction: Not Applicable

### Environmental Specification

- Operating Temp: -55 to +155 Deg C.
- IP Rating (Mated): IP64

### Electrical Specification


- Impedance: 50 Ohm
- Frequency: 0-3 GHz
- Dielectric W/V: 1500 Veff
- Insulation res: 5000 M-Ohm

### Mechanical Specification

- Contact Retention: 27 N min
- Cable Retention: 400 N min
- Mating cycles: 250
- Weight: 43.42 g

### Connector Interface

image for illustration purposes only



7	EASIFIT CONTACT	BeCu	GOLD
6	CENTRE CONTACT	PHOS. BRONZE	GOLD
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	WHITE BRONZE
3	INSULATOR	PTFE	N/A
2	BODY	BRASS	WHITE BRONZE
1	COUPLING NUT	BRASS	WHITE BRONZE
ITEM	DESCRIPTION	MATERIAL	PLATING

A4 SHEET 1 OF 1



DIMENSIONS ARE IN MILLIMETRES

REVISION : C03

NAME	SIGNATURE	DATE
DRAWN	IG	15/12/2011
CHK'D	GE	22/12/2011
APPV'D		

ISSUE : 0

6-8 COLNE ROAD,  
TWICKENHAM,  
MIDDLESEX.  
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.