



TNC JACK SCF14-50J

13-052-P3-RB

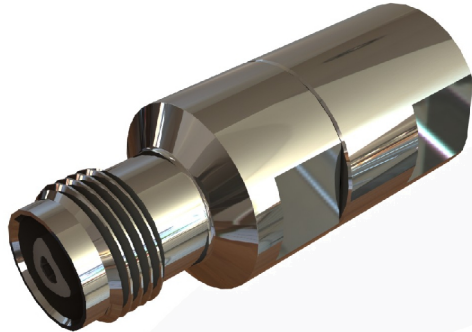


images for illustration purposes only

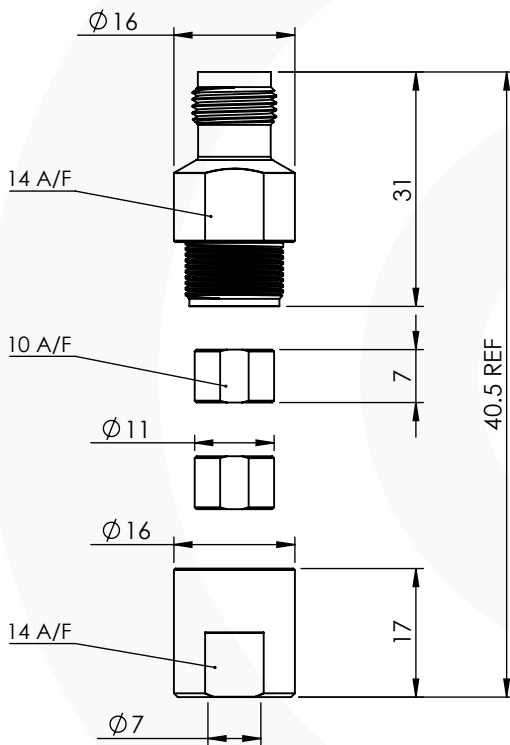

Suitable for Cables:

(RB) SCF 14-50J

Stripping Dimensions



$a = 6.0 \text{ mm}$
 $b = 40.0 \text{ mm}$

Assembly Procedure: AP027

Tooling

Centre Contact: N/A

Tool No: N/A

Crimp Sleeve: N/A

Tool No: N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C

IP Rating (Mated): IP 65

Electrical Specification

Impedance: 50 Ohm

Frequency: 0 - 3 GHz

Dielectric W/V: TBC Veff

Insulation res: TBC M-Ohm

Mechanical Specification

Contact Retention: 20N N min


Cable Retention: TBC N min

Mating cycles: 500

Weight: 40.07 g

Connector Interface

image for illustration purposes only



5	REAR NUT	BRASS	WHITE BRONZE
4	CABLE CLAMP	BRASS	SILVER
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	SILVER
1	BODY	BRASS	WHITE BRONZE

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A01	NAME	SIGNATURE
ISSUE :	0	DATE	
		DRAWN	GE
		CHK'D	IG
		APPV'D	
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>			