



## TNC STRAIGHT CRIMP / CRIMP JACK FOR CABLE GROUP AD 13-055-A3-AD

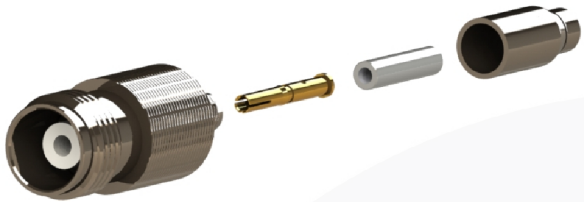


images for illustration purposes only

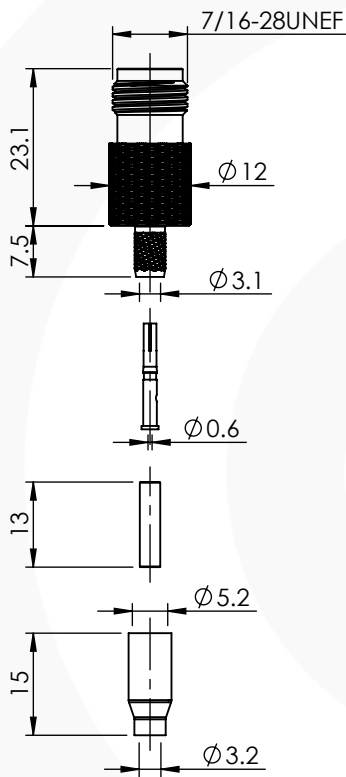

### Suitable for Cables:

(AD) RG316, RG174, RG188, LMR100, WBC100, URM95, KX3, KX22

### Stripping Dimensions



a = 4 mm  
b = 8 mm  
c = 16 mm  
d = 12 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure: AP002

### Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: Hex 5.41mm A/F Tool No: 336A

Alignment Tool: Not Applicable Extraction: Not Applicable

### Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 64

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0 - 6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 100 N min

Mating cycles: 500

Weight: 14.23g

### Connector Interface

image for illustration purposes only



6	CRIMP SLEEVE	ZINC	NICKEL
5	PUSHER SLEEVE	DELTRIN	N/A
4	FEMALE CONTACT	PHOSPHOR BRONZE	GOLD
3	RETAINER	BRASS	NICKEL
2	INSULATOR	DELTRIN	N/A
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
DRAWN	BS			08/08/2017
ISSUE :	1	CHK'D	I.G.	02/10/2017
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D		
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				