

© 2008. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

WEBSITE VIDEO No.

DO NOT SCALE DRAWING



Electrical Specification

Impedance: 50 Ohm
 Frequency: 0 - 12 GHz (Cable Limited)
 Dielectric W/V: 1500 V rms
 Insulation res: 5000 M-OhM min

Mechanical Specification


Centre contact retention Axial Force: TBC
 Cable Retention: N/A
 Mating cycles: 500

Environmental Specification

Operating Temp: TBC

Tooling

Centre Contact: SOLDER
 COAX Tool No:
 Crimp Sleeve: N/A
 COAX Tool No:

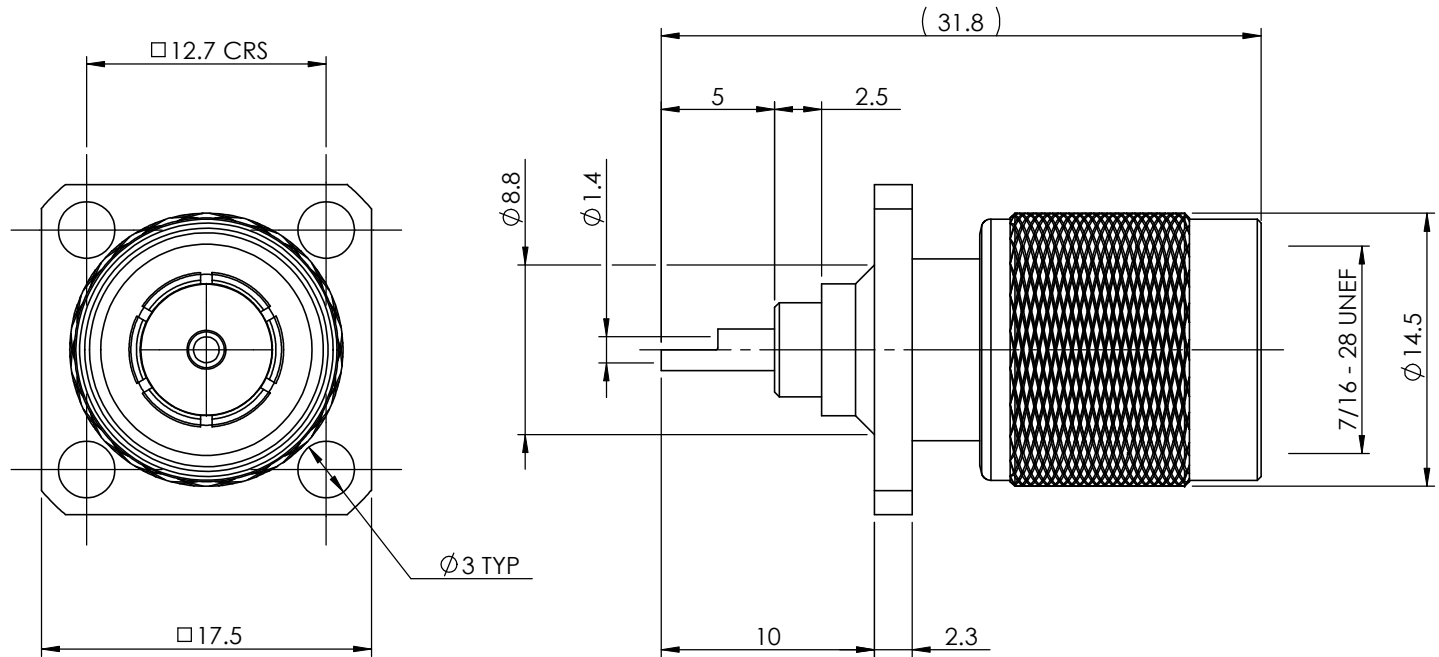

8	COUPLING NUT	BRASS	NICKEL
7	RETAINING WASHER	BRASS	NICKEL
6	RETAINING RING	SK5	NICKEL
5	GASKET	SILICONE	N/A
4	INSULATOR	DELRIN	N/A
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING



COAX CONNECTORS LTD
 6-8 COLNE ROAD, TWICKENHAM,
 MIDDLESEX. TW1 4JR

REVISION : A00
 ISSUE : 2

DIMENSIONS ARE IN MILLIMETERS			
	NAME	SIGNATURE	DATE
DRAWN	GE		21/01/2010
CHK'D	WF		21/01/2010
APPV'D			

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Description	TNC FLANGED PLUG
Part Number	13-322-B3