



## TNC 4 HOLE SEALED FLANGE JACK

### 13-373-B3

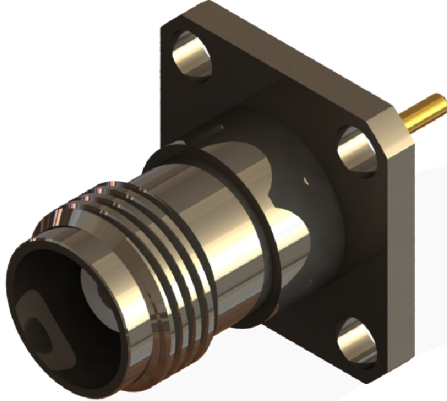


images for illustration purposes only

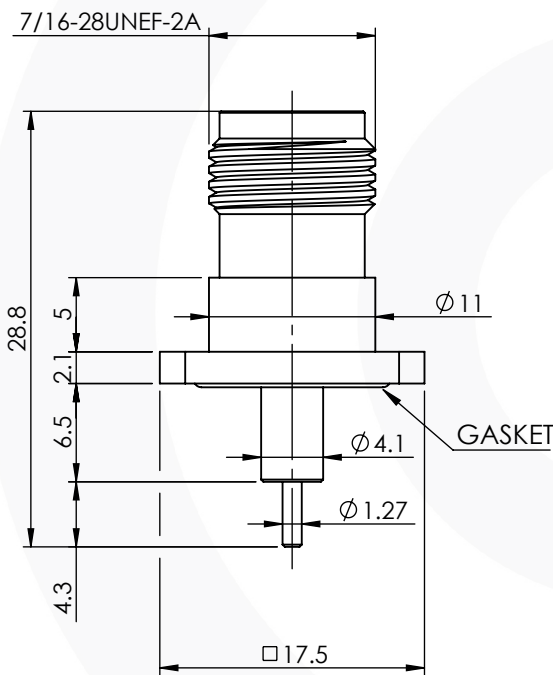

### Suitable for Cables:

Direct Solder

### Hole Layout

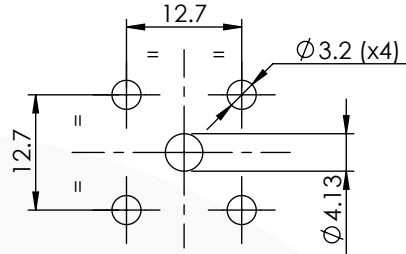

### Tooling

Centre Contact: Solder

Crimp Sleeve: Solder

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 250

Weight: 10.44 g

### Connector Interface

image for illustration purposes only



| 4    | O-RING         | SILICONE   | N/A     |
|------|----------------|------------|---------|
| 3    | INSULATOR      | PTFE       | N/A     |
| 2    | CENTRE CONTACT | PH. BRONZE | GOLD    |
| 1    | BODY           | BRASS      | NICKEL  |
| ITEM | DESCRIPTION    | MATERIAL   | PLATING |

|  |              |        |           |
|--|--------------|--------|-----------|
| <b>A4</b>  | SHEET 1 OF 1 |        |           |
| DIMENSIONS ARE IN MILLIMETRES  |              |        |           |
| REVISION :   | A00          | NAME   | SIGNATURE |
| ISSUE :  | 2            | DATE   |           |
|  |              | DRAWN  | P.P.      |
|  |              | CHK'D  | GE        |
|  |              | APPV'D |           |
| <p>6-8 COLNE ROAD,<br/>TWICKENHAM,<br/>MIDDLESEX.<br/>TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p> |              |        |           |