



TNC RIGHT ANGLE BULKHEAD PCB JACK


13-468-A3

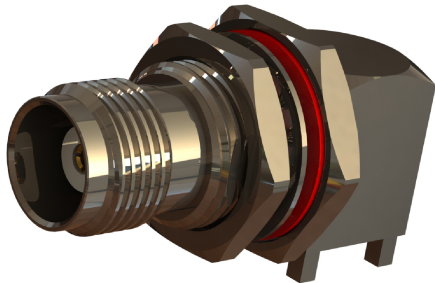


images for illustration purposes only

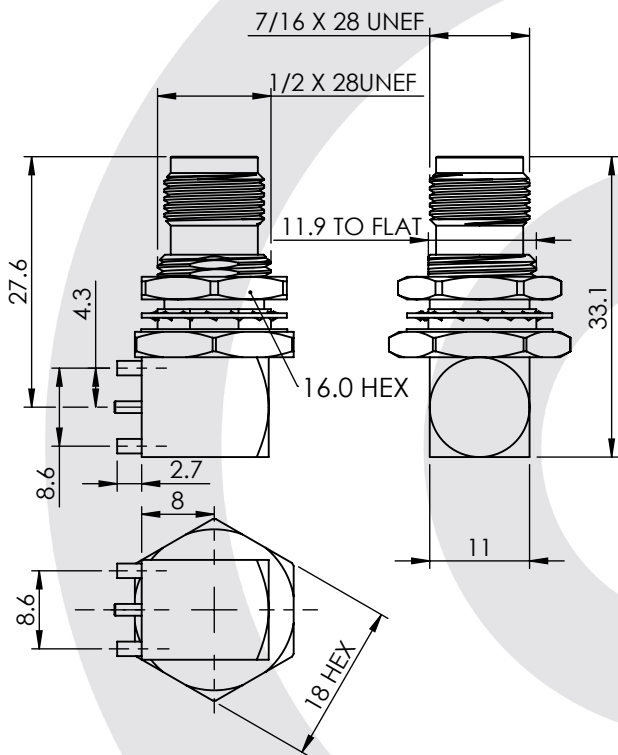

Recommended Mounting Hole

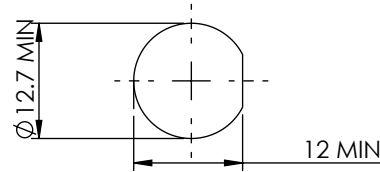

Recommended PCB Layout

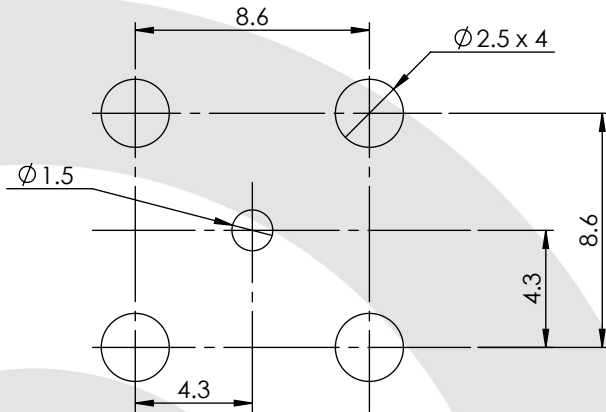

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-2 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A N min

Mating cycles: 250

Weight: 26.53 g

Connector Interface

image for illustration purposes only



7	WASHER	SK5	NICKEL
6	NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	FRONT BODY	BRASS	NICKEL
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	REAR BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	11/06/2014
		CHK'D	GE	12/06/2014
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				