



## TNC REVERSE POLARITY CRIMP, CRIMP JACK

### 14-054-B3-DE

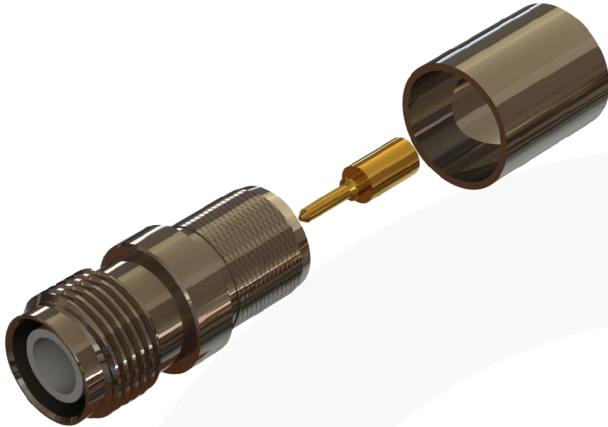


images for illustration purposes only

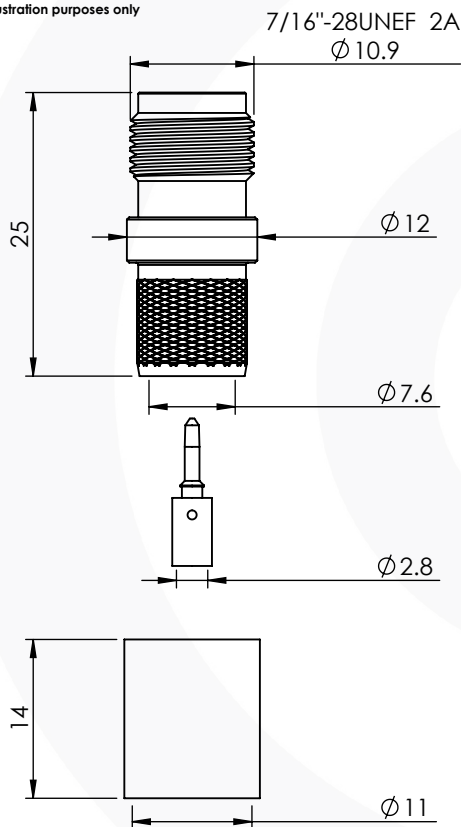

### Suitable for Cables:

(DE) LMR400, TZC50032, Belden 9913, RG8

### Stripping Dimensions



a = 4.50 mm  
b = 9.0 mm  
c = 13.5 mm  
d = 9.0 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure: AP004

### Tooling

Centre Contact: Hex 3.25mm A/F Tool No: 336K

Crimp Sleeve: Hex 10.9mm A/F Tool No: 336k

**NOTE: FOR COPPER CLAD ALLUMINIUM CABLES ie LMR 400  
WE RECOMMEND SOLDERING CENTRE TO AP014**

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 20 N min

Cable Retention: 200 N min

Mating cycles: 500

Weight: 11.43 g

### Connector Interface

image for illustration purposes only



4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	S.O'D.	01/04/2016
		CHK'D	G.E.	01/04/2016
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				