



MINIATURE COAX CRIMP CLAMP PLUG 19-001-F3-AD

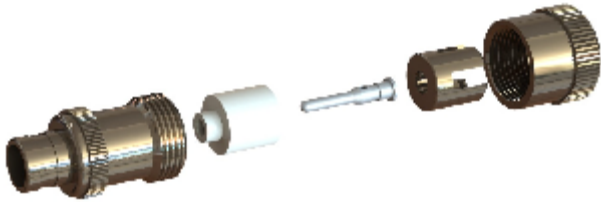


images for illustration purposes only

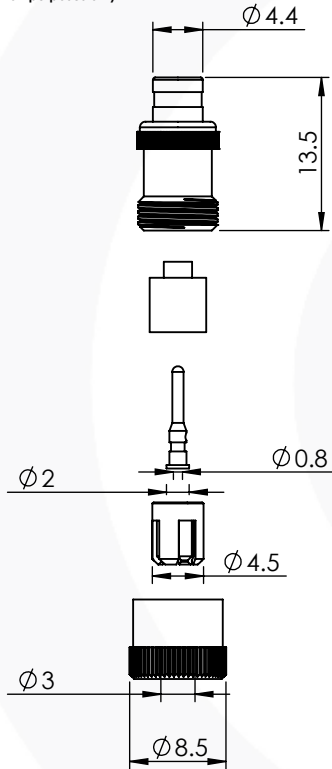

Suitable for Cables:

RG316, RG174, RG188, LMR100, WBC00, URM95, KX3, KX22

Stripping Dimensions



a = 3.0 mm
b = 11.0 mm
c = 11.0 mm
d = 4.5 mm

Assembly Procedure: AP031

Tooling

Centre Contact: Solder Tool No: Not Applicable

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Alignment Tool: Extraction:

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP30

Electrical Specification


Impedance: 50 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 500 Veff
Insulation res: 1000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: 40 N min
Mating cycles: 500
Weight: 3.34 g

Connector Interface

image for illustration purposes only



5	REAR BODY	BRASS	NICKEL
4	CABLE CLAMP	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	SILVER
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	25/10/2012
		CHK'D	GE	31/10/2012
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				