


2 HOLE FLANGE MOUNT JACK SOLDER SPILL

19-368-E3

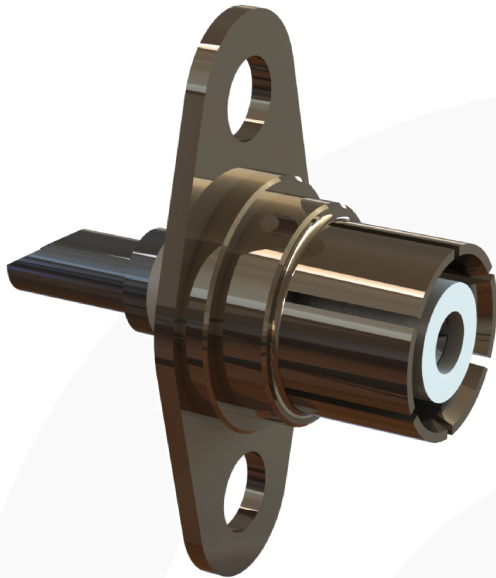

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 44

Electrical Specification


Impedance: 50 Ohm
Frequency: 3 GHz
Dielectric W/V: 1000 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification


Contact Retention: 20 N min
Cable Retention: N/A N min
Mating cycles: 500
Weight: 1.16 g

Connector Interface

Image for illustration purposes only

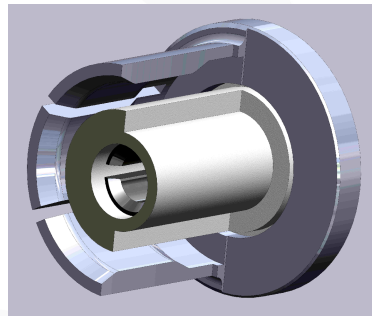

Images for illustration purposes only

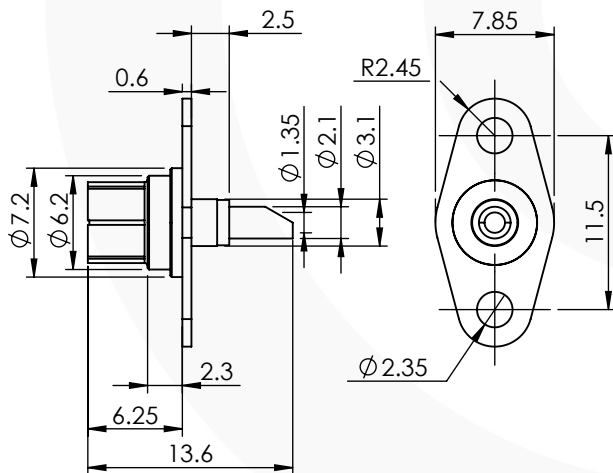

3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	SILVER
1	BODY	PHOSPHOR BRONZE	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B01	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	20/09/17
		CHK'D	GE	21/09/17
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				