



PCB MOUNT JACK

19-450-B3

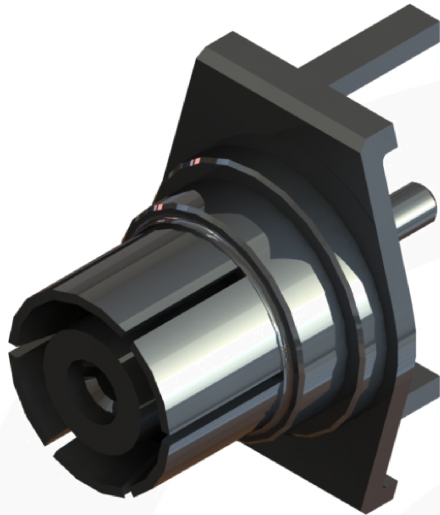


images for illustration purposes only

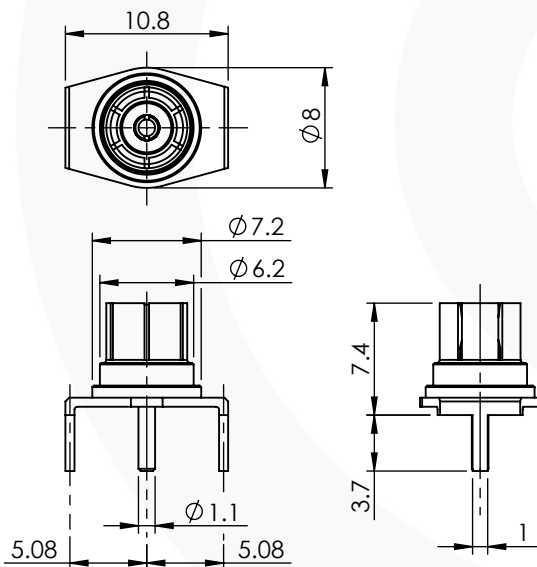

Recommended Hole Layout

(To suit thicknesses upto 2.38mm)

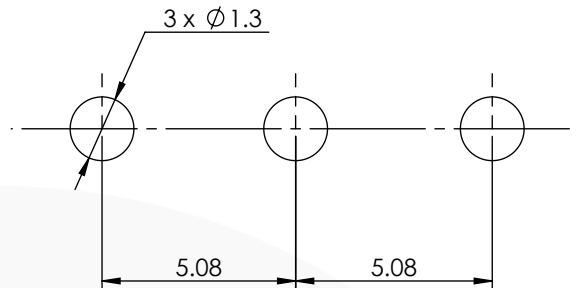

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 44

Electrical Specification

Impedance: 50 Ohm

Frequency: 3 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 20 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 1.01 g

Connector Interface

image for illustration purposes only



3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	SILVER
1	BODY	PHOSPHOR BRONZE	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	01/12/17
		CHK'D	I.G.	01/12/17
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				