



BT54 RIGHT ANGLE SOLDER/CRIMP PLUG 5A 24-104-B6-BD




images for illustration purposes only

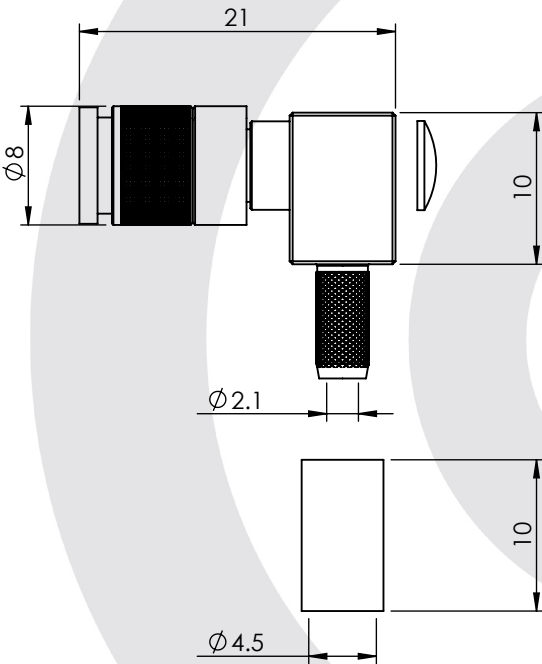

Suitable for Cables:

(BD) BT3002, TZC75024, TZC75025

Stripping Dimensions



a = 3.0 mm
b = 8.0 mm
c = 15.0 mm
d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP017

Tooling

Centre Contact: Solder Tool No: Solder
Crimp Sleeve: Hex 4.52mm A/F Tool No: HTS-43
Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-3 GHz
Dielectric W/V: 750 Veff
Insulation res: 200 M-Ohm

Mechanical Specification

Contact Retention: 15 N min
Cable Retention: 150 N min
Mating cycles: 250
Weight: 6.35 g

Connector Interface

image for illustration purposes only



7	LATCHING SLEEVE	BRASS	NICKEL
6	OUTER CONTACT	BERYLLIUM COPPER	GOLD
5	CAP	BRASS	NICKEL
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES				
REVISION :	B04		NAME	SIGNATURE	DATE	
DRAWN :	2		GE		05/01/2007	
ISSUE :			CHK'D	IG		08/03/2007
			APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>						