



## UH43 STRAIGHT CRIMP/CRIMP PLUG 4 GTIS 43-014-D6-AB

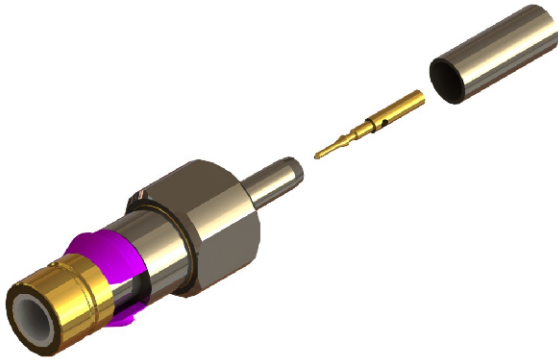


images for illustration purposes only

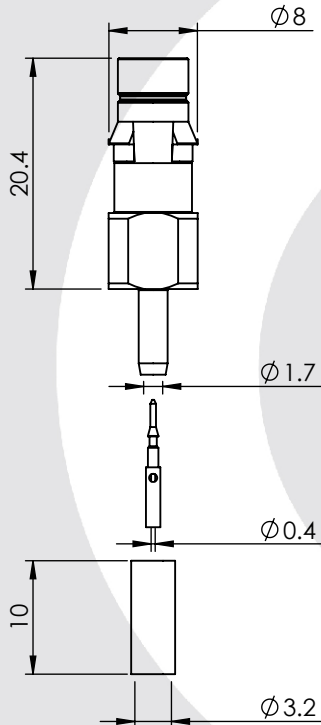

### Suitable for Cables:

(AB) RG179, RG187, Belden 179DT

### Stripping Dimensions



a = 4.5 mm  
b = 8.0 mm  
c = 21.0 mm  
d = 16.5 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure: AP023

### Tooling

Centre Contact: Square Crimp Tool No: HTS-43

Crimp Sleeve: HEX 3.25mm A/F Tool No: HTS-43

Alignment Tool: Not Applicable Extraction: 96-833-TOOL

### Environmental Specification

Operating Temp: -40 to +100 Deg C

IP Rating (Mated): NONE

### Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 3 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 22 N min


Cable Retention: 60 N min

Mating cycles: 250

Weight: 5.62 g

### Connector Interface

image for illustration purposes only



5	RETAINING RING	PBT	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL/GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
DRAWN		GE		03/02/2009
ISSUE :	2	CHK'D	IG	05/02/2009
APPV'D				
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				