



9B U-Link (30db) 43-533-D6

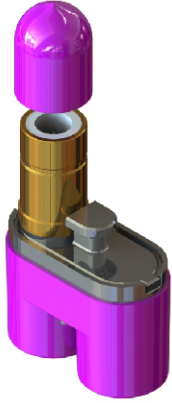

images for illustration purposes only

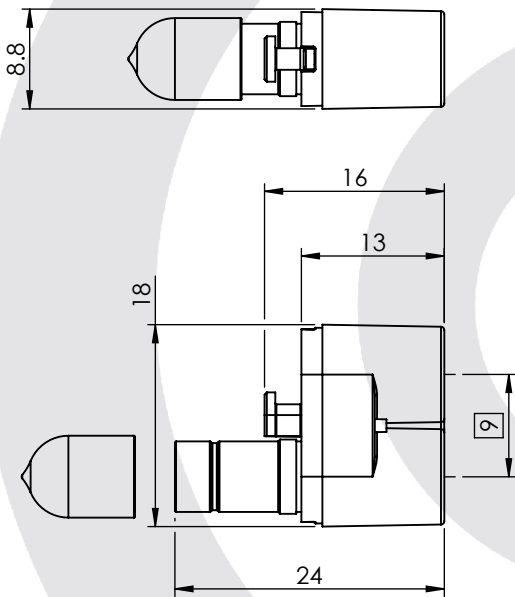

Tooling: Extraction: 96-833-TOOL

Environmental Specification

Operating Temp: -40 to +100 Deg C
IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-3 GHz
Dielectric W/V: 1500 Veff
Insulation res: 500 M-Ohm

Mechanical Specification

Contact Retention: 22 N min
Cable Retention: Not Applicable
Mating cycles: 250
Weight: 24.95 g

Connector Interface

image for illustration purposes only

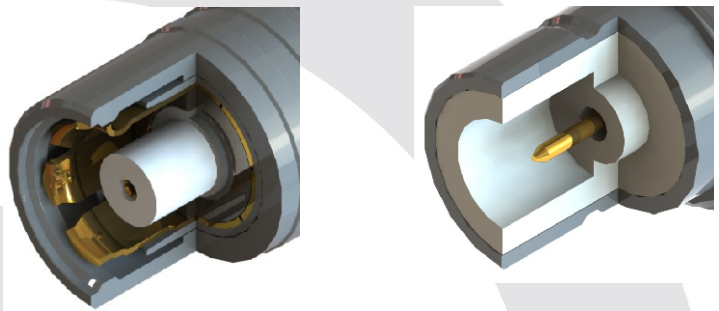

7	CAP	PVC	N/A
8	OUTER BODY	PBT	N/A
5	TESTPORT BODY	BRASS	GOLD
4	OUTER CONTACT	BERYLLIUM COPPER	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	ZINC	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01		NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	IG		06/08/2007
		CHK'D	GE		06/08/2007
		APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>					