


BMA STRAIGHT EASYFIT/SOLDER FLOATING BULKHEAD JACK

57-292-D3-HA




images for illustration purposes only

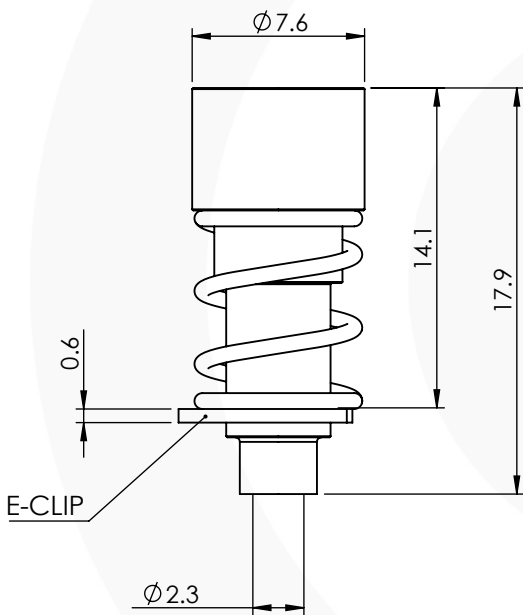

Suitable for Cables:

(HA) RG405 (0.085"), UT85

Stripping Dimensions



a = 4.0 mm
 b = 9.0 mm
 c = 13.0 mm
 d = 9.0 mm

} IF SHEATHED CABLE IS USED

* CUT FOIL TO DIM. "b"

Assembly Procedure: TBA

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable

Crimp Sleeve: Solder Tool No: Not Applicable

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -40 to +105 Deg C.

IP Rating (Mated): NONE

Electrical Specification


Impedance: 50 Ohm
 Frequency: 0-18 GHz
 Dielectric W/V: 1000 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification


Contact Retention: 27 N min
 Cable Retention: 130 N min
 Mating cycles: 500
 Weight: 1.95 g

Connector Interface

image for illustration purposes only



Recommended Mounting

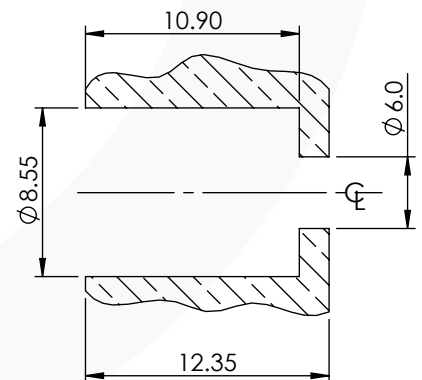

6	CENTRE CONTACT CAP	BRASS	GOLD
5	CENTRE CONTACT	BeCu	GOLD
4	INSULATOR	PTFE	N/A
3	SPRING	SUS304	ZINC
2	BODY	BRASS	GOLD
1	E - CLIP	SUS304	ZINC
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	05/06/2020
		CHK'D	P.P.	05/06/2020
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				