



BNC STRAIGHT JACK TO JACK ADAPTOR 10-500-B36



images for illustration purposes only

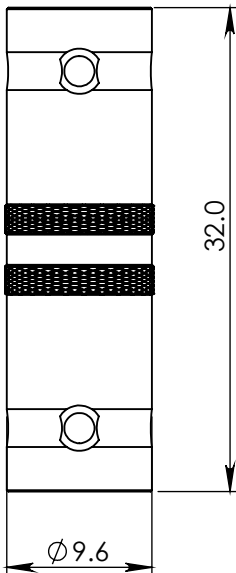


Suitable for Cables:

N/A

Connector Interface

image for illustration purposes only



Tooling

Centre Contact: N/A

Tool No: N/A

Crimp Sleeve: N/A

Tool No: N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 4 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min

Cable Retention: N/A

Mating cycles: 250

Weight: 7.50 g


FREQUENCY RESPONSE

1.0 GHz - 27.7dB

2.0 GHz - 26.6dB

3.0 GHz - 26.4dB

4.5 GHz - 18.5dB

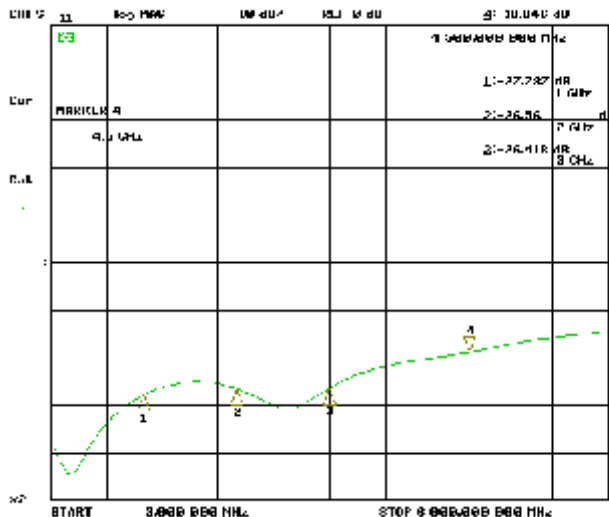

3	CENTRE CONTACT	PHOS. BRONZE	GOLD
2	BODY	BRASS	NICKEL
1	INSULATOR	PTFE	N/A
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	0	DRAWN	GE	27/10/2008
		CHK'D	IG	30/10/2008
		APPV'D		
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR