

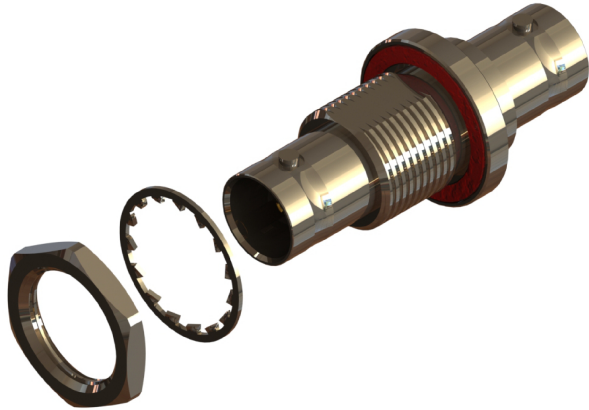


## BNC STRAIGHT BULKHEAD JACK TO JACK ADAPTOR


### 10-501-A6

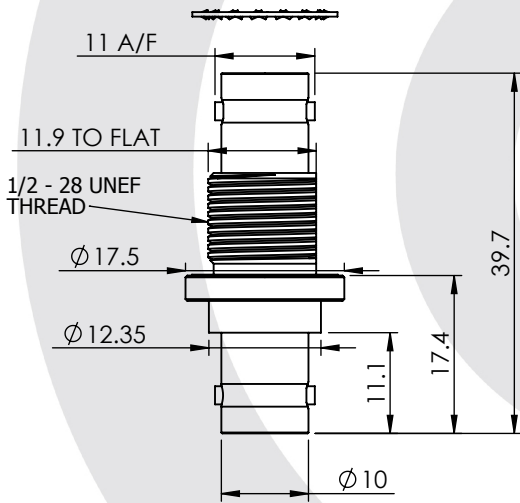

images for illustration purposes only



### Recommended Mounting Hole



### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 66 MATED

### Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 4.5 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 22 N min


Cable Retention: N/A

Mating cycles: 250

Weight: 20.50 g

### Connector Interface

image for illustration purposes only



6	WASHER	SK5	NICKEL
5	NUT	BRASS	NICKEL
4	GASKET	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	27/08/2014
		CHK'D	IG	28/08/2014
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				