




BNC STRAIGHT BULKHEAD JACK TO JACK ADAPTOR

10-501-B36

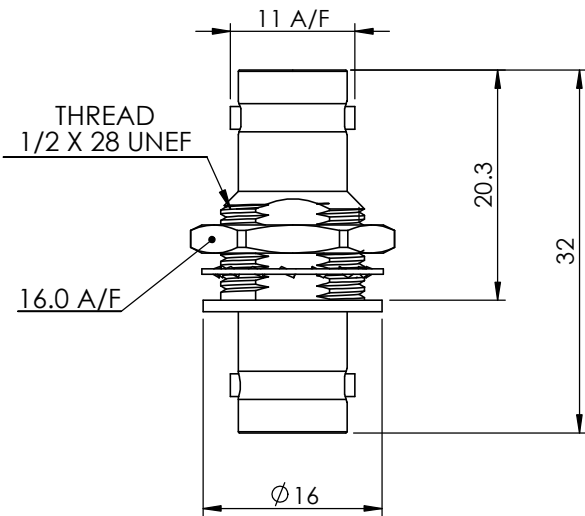

Images for illustration purposes only

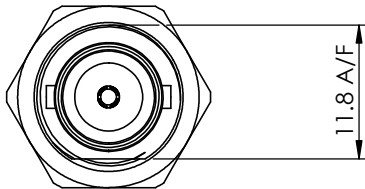

5.0 MAX PANEL THICKNESS

Suitable for Cables:

Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 4.5 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 22 N min

Cable Retention: N/A


Mating cycles: 100

Weight: 14.51 g

Recommended Mounting Hole

Connector Interface

image for illustration purposes only



Performance


-29.4 dB @ 1.0 GHz

-42.8 dB @ 2.0 GHz

-27.9 dB @ 4.5 GHz

-20.5 dB @ 6.0 GHz

Return Loss Graph

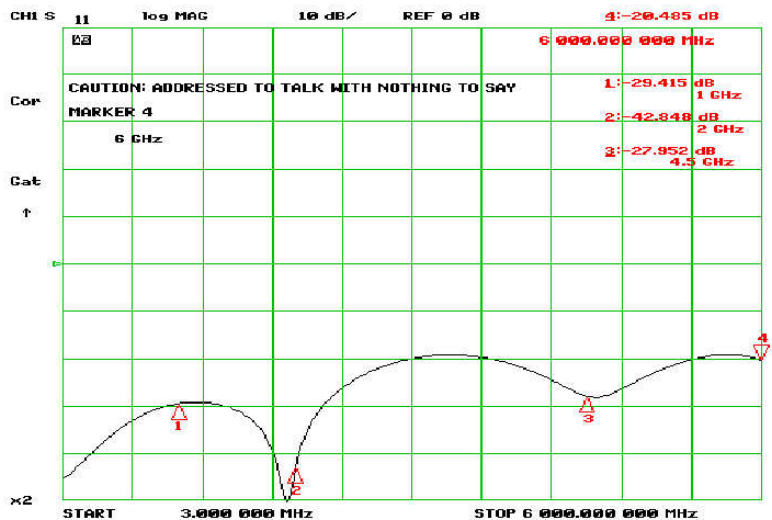

6	WASHER	SK5	NICKEL
5	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	Beryllium Copper	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	GE	27/05/2010
		CHK'D	IG	27/05/2010
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				