


## BNC INSULATED BULKHEAD JACK TO JACK ADAPTOR 12 GHz

### 10-503-B126-HM



images for illustration purposes only

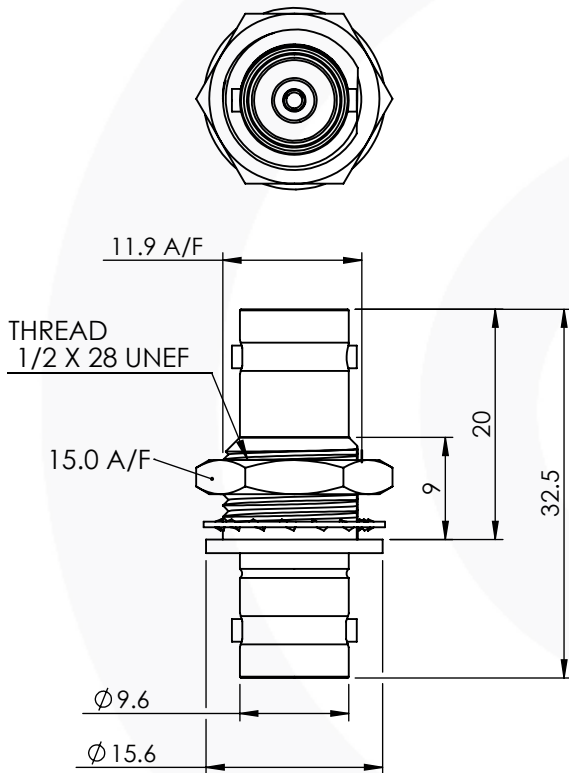

### Suitable for Cables:

Not Applicable

### Environmental Specification

Operating Temp: -35 to +70 Deg C

IP Rating (Mated): IP 40

### Electrical Specification Mechanical Specification

Impedance: 75 Ohm

Contact Retention: 10 N min

Frequency: 0 - 18 GHz

Cable Retention: N/A


Dielectric W/V: 1500 Veff

Mating cycles: 1000

Insulation res: 5000 M-Ohm

Weight: 11.35 g

### Recommended Mounting Hole



5.0 MAX PANEL THICKNESS

### Connector Interface



image for illustration purposes only

6	WASHER	BeCu	NICKEL
5	NUT	BRASS	NICKEL
4	INSULATION	ABS	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	04/06/20
		CHK'D	P.P.	04/06/20
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				