



BNC INSULATED BULKHEAD JACK TO JACK ADAPTOR 12 GHz

10-503-W126

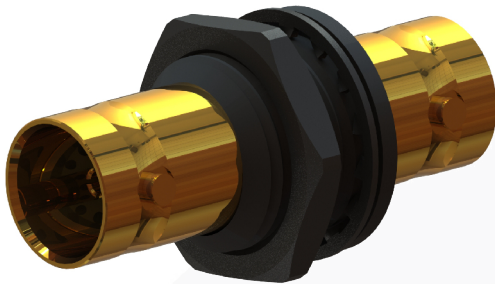

images for illustration purposes only

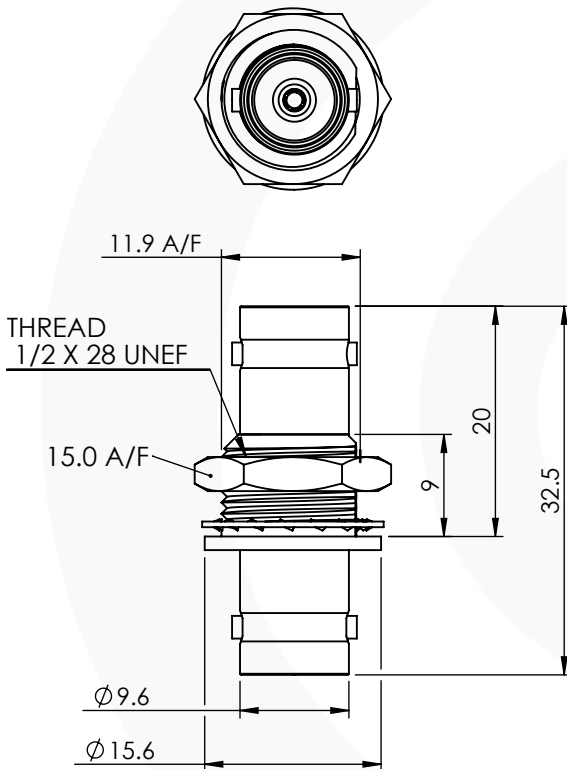

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -35 to +70 Deg C

IP Rating (Mated): IP 64

Electrical Specification Mechanical Specification

Impedance: 75 Ohm

Contact Retention: 10 N min

Frequency: 0 - 18 GHz

Cable Retention: N/A


Dielectric W/V: 1500 Veff

Mating cycles: 500

Insulation res: 5000 M-Ohm

Weight: 11.27 g

Recommended Mounting Hole



5.0 MAX PANEL THICKNESS

Connector Interface





image for illustration purposes only

Performance

- 28.0203 dB @ 3.0 GHz
- 25.8473 dB @ 4.5 GHz
- 24.2132 dB @ 6.0 GHz
- 23.3678 dB @ 9.0 GHz
- 33.2842 dB @ 12.0 GHz
- 12.7172 dB @ 18.0 GHz

Return Loss Graph

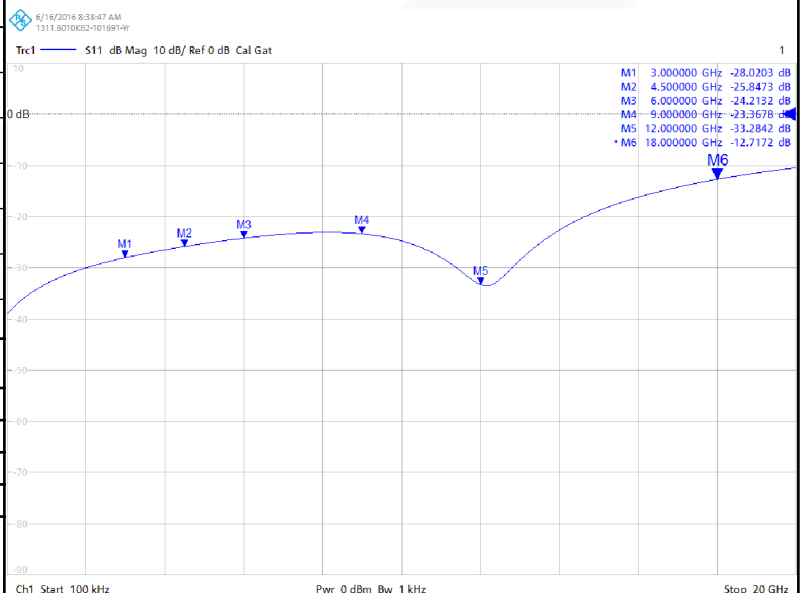

ITEM	DESCRIPTION	MATERIAL	PLATING
6	WASHER	BeCu	BLACK NICKEL
5	NUT	BRASS	BLACK NICKEL
4	INSULATION	ABS	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES				
REVISION :	C00		NAME	SIGNATURE	DATE	
ISSUE :	1		DRAWN	S.O'D.		07/03/2016
			CHK'D	I.G.		07/03/2016
			APPV'D			
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.						