



SMA 4 HOLE FLANGE BULKHEAD IP68 JACK/JACK ADAPTOR


30-506-J3-IP68

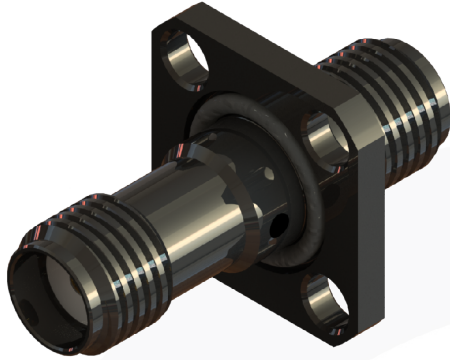

images for illustration purposes only

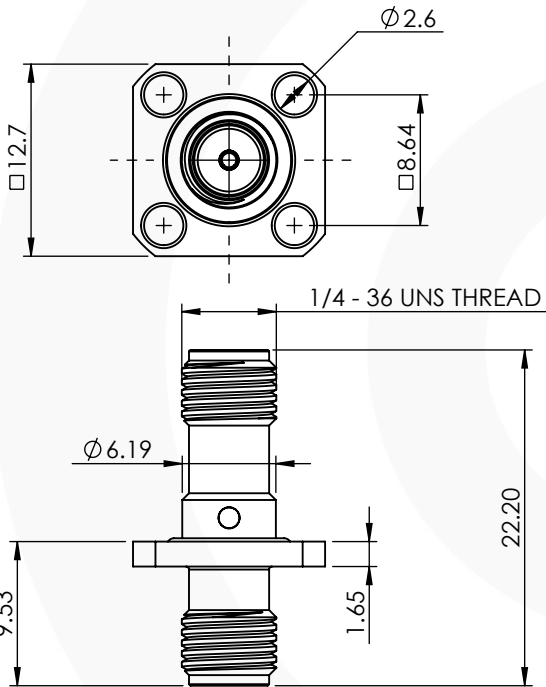

Recommended Mounting Hole

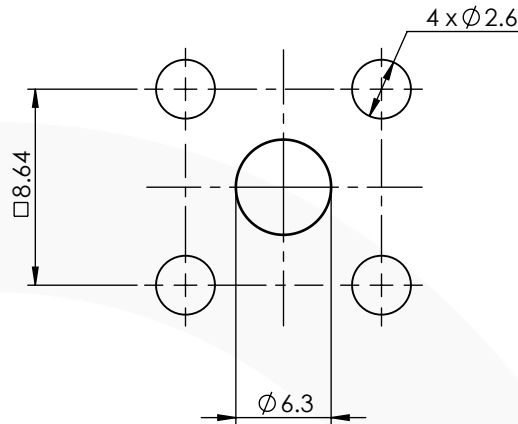

MAXIMUM PANEL THICKNESS: 6.35mm

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (unmated): IP 68

Electrical Specification

Impedance: 50 Ohm
Frequency: 0-18 GHz
Dielectric W/V: 1000 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min
Cable Retention: NOT APPLICABLE
Mating cycles: 100
Weight: 4.20 g

Connector Interface

image for illustration purposes only



5	ENCAPSULATION	BLACK EPOXY	N/A
4	O-RING	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	BLACK NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A02	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	20/05/2019
		CHK'D	P.P.	21/05/2019
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				