



## TNC STRAIGHT 4 HOLE SEALED FLANGE MOUNT SOLDER/SOLDER JACK

### 13-383-H3-HA

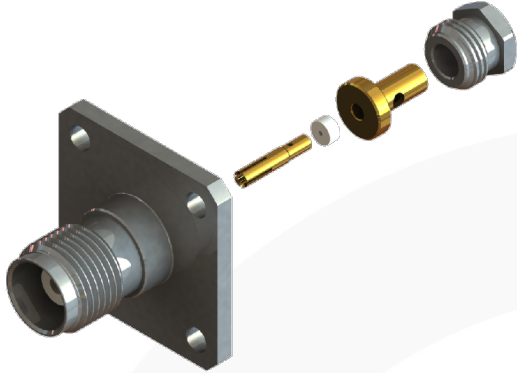

images for illustration purposes only

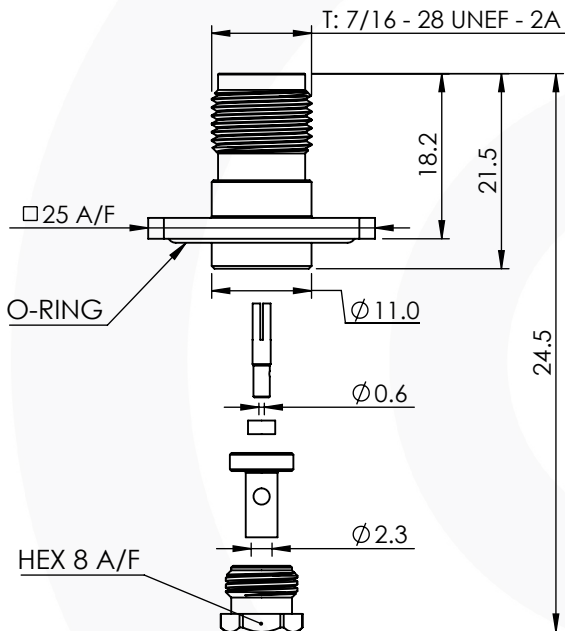


### Suitable for Cables:


(HA) RG405 (0.085"), UT85

### Stripping Dimensions

a = 4.5 mm



### Mounting Dimensions

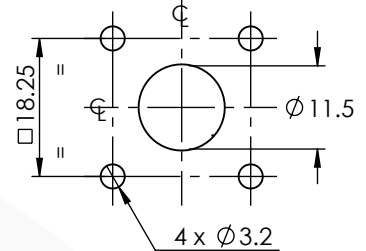

### Assembly Procedure:

#### Tooling

Centre Contact: Solder

Tool No: Not Applicable

Crimp Sleeve: Solder

Tool No: Not Applicable

Alignment Tool: Not Applicable

Extraction: Not Applicable

### Environmental Specification

Operating Temp: -55 to +125 Deg C.

IP Rating (Mated): IP 67

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 18.93 g

### Connector Interface

image for illustration purposes only



6	NUT	STAINLESS STEEL	PASSIVATED
5	O-RING	SILICONE	N/A
4	SOLDER FERRULE	BRASS	GOLD
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	01/03/2023
		CHK'D	P.S.	01/03/2023
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				