


BNC INSULATED FRONT MOUNT BULKHEAD SOLDER JACK


10-351-K3



images for illustration purposes only

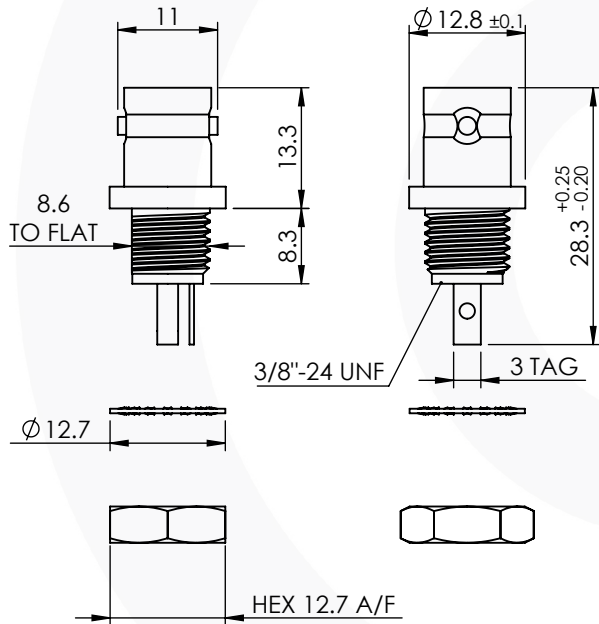

Recommended Mounting:



Environmental Specification

Operating Temp: -40 to +140 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-2 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 6.93 g

Connector Interface

image for illustration purposes only



ITEM	DESCRIPTION	MATERIAL	PLATING
6	NUT	BRASS	NICKEL
5	SOLDER TAG	BRASS	TIN
4	LOCKWASHER	SK5	NICKEL
3	MOULDED BODY	PBT	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	FRONT BODY	BRASS	NICKEL

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	G.E.	18/07/2023
		CHK'D	P.S.	18/07/2023
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				