

PRODUCT DATASHEET

BNC FRONT MOUNT BULKHEAD JACK RECEPTACLE

10-352-A3

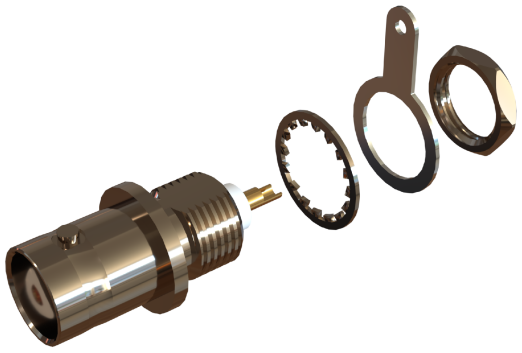

images for illustration purposes only

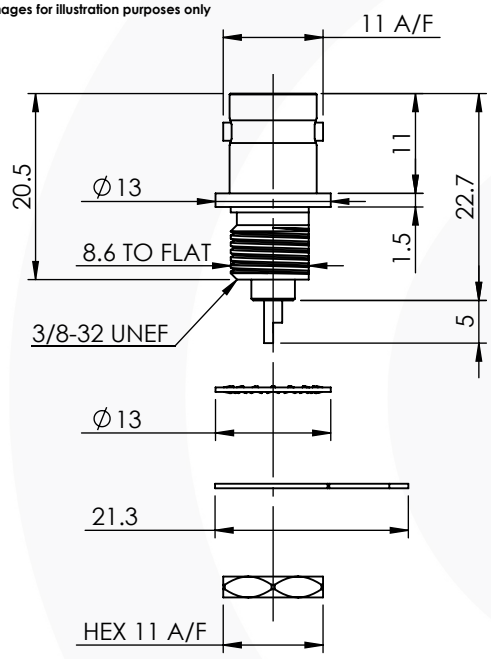


ITEM	DESCRIPTION	MATERIAL	PLATING
7	WASHERS	Fe	NICKEL
6	RETAINER	BRASS	NICKEL
5	SOLDER TAG	BRASS	NICKEL
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES
REVISION :	B00		NAME / SIGNATURE / DATE
ISSUE :	1	DRAWN	GE / 10/12/2012
		CHK'D	IG / 10/12/2012
		APPV'D	

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS,WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Mounting Detail:

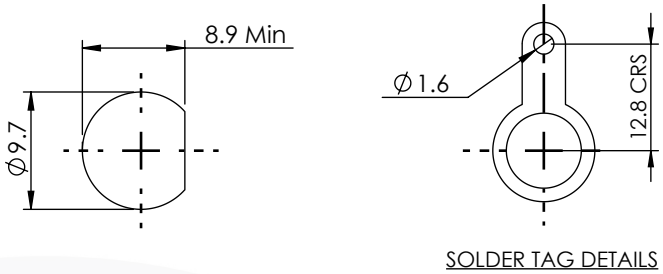

SOLDER TAG DETAILS

MAX RECOMMENDED PANEL THICKNESS = 4.0mm

Assembly Procedure: AP002

Tooling

Centre Contact: Solder — Tool No: Solder

Crimp Sleeve: Not Applicable — Tool No: Not Applicable

Alignment Tool: Not Applicable — Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-3 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: NOT APPLICABLE

Mating cycles: 500

Weight: 8.29 g

Connector Interface

image for illustration purposes only



© 2025. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

Model File: C:\Fusion Components Ltd\CAD Data\Solid Models\Z - Match IT SERIES\TOP LEVEL\BNC 10135

Cad File: C:\Fusion Components Ltd\CAD Data\Drawings\Z - Match IT SERIES\DATA SHEETS\10-352-A3