




BNC RIGHT ANGLE BULKHEAD PCB JACK 10-466-A8

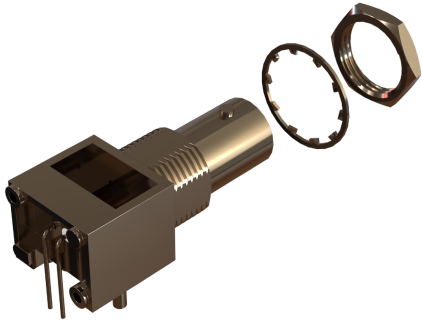

images for illustration purposes only

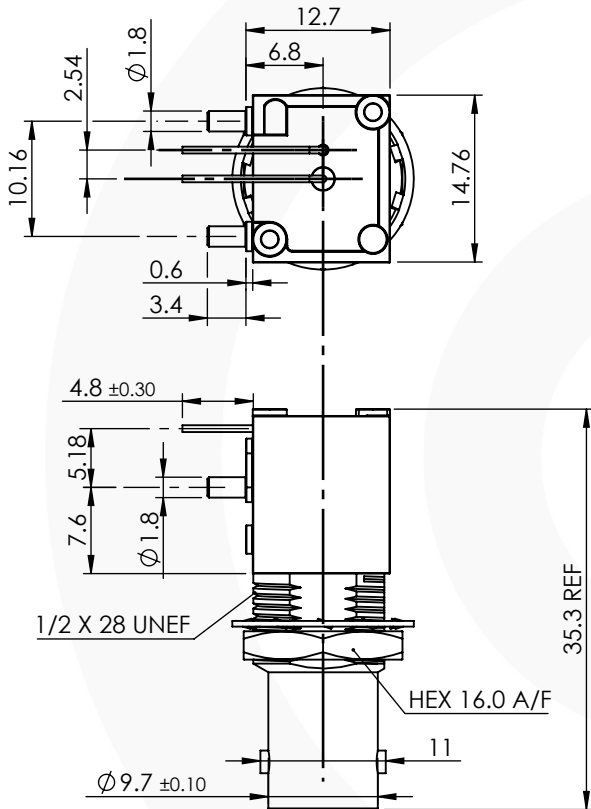

Recommended Mounting

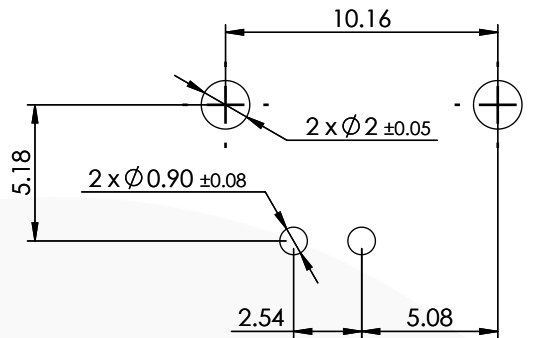

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-1 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: Not Applicable

Mating cycles: 500


Weight: 17.00 g

Connector Interface

image for illustration purposes only



Panel Mount



Max. Recommended Panel
Thickness = 5.5mm

6	SOLDER TAILS	BRASS	TIN
5	NUT	BRASS	NICKEL
4	WASHER	STEEL	NICKEL
3	INSULATOR	PE-606	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	ZINC	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	DRAWN	G.E.		10/08/2026
ISSUE :	1	CHK'D	P.S.		10/08/2026
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D			
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.					