



BNC RIGHT ANGLED PCB IP67 BULKHEAD JACK 10-470-1-BSn126



images for illustration purposes only

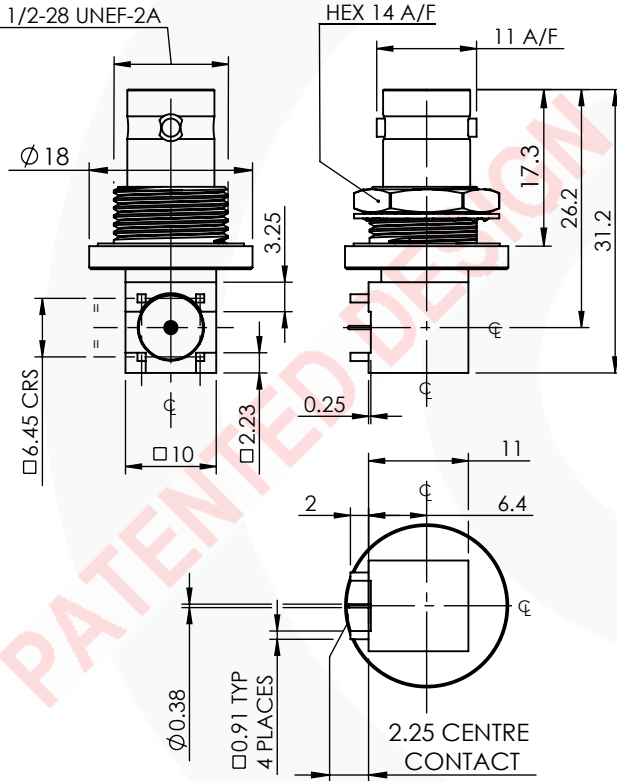


Recommended Hole Layout

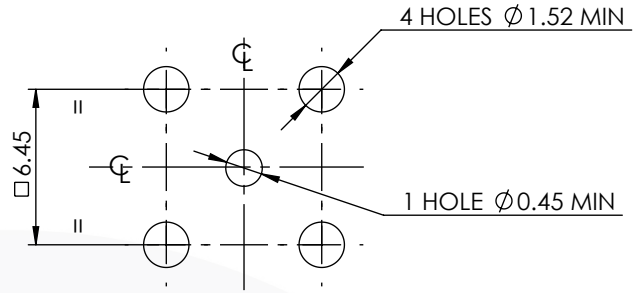

Panel Thickness: 1.5mm Max

Recommended Panel Nut Torque = 250N.cm

Recommended Panel Cutout

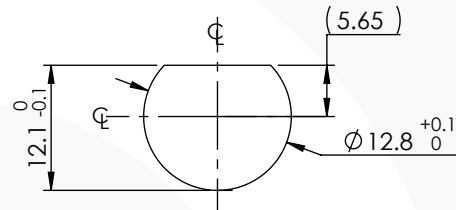

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 22 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 17.44 g

Connector Interface

image for illustration purposes only



7	GASKET	SILICONE	N/A
6	REAR BODY	BRASS	TIN
5	LOCK WASHER	SK5	BLACK NICKEL
4	NUT	BRASS	BLACK NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	FRONT BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	G.E.	10/07/2023
		CHK'D	P.S.	10/07/2023
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				