



BNC INSULATED BULKHEAD JACK TO JACK ADAPTOR 12 GHz

10-503-1-B126

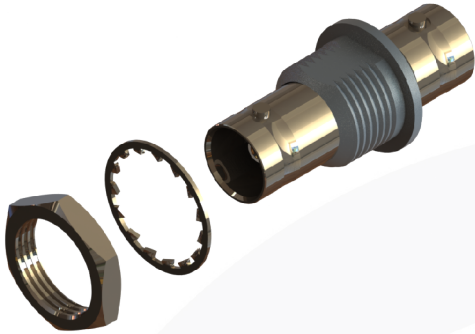

images for illustration purposes only

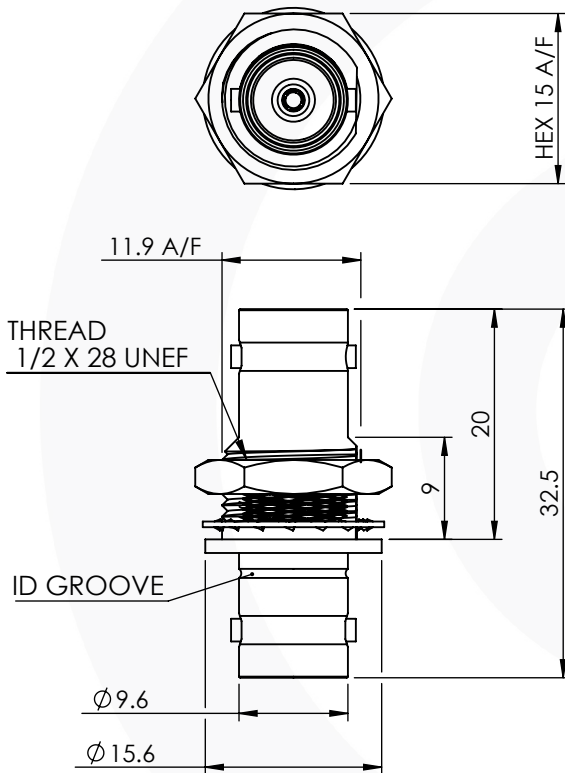

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -35 to +70 Deg C

IP Rating (Mated): IP 64

Electrical Specification Mechanical Specification

Impedance: 75 Ohm

Contact Retention: 10 N min

Frequency: 0 - 12 GHz

Cable Retention: N/A


Dielectric W/V: 1500 Veff

Mating cycles: 250

Insulation res: 5000 M-Ohm

Weight: 11.06 g

Recommended Mounting Hole



5.0 MAX PANEL THICKNESS

Connector Interface




image for illustration purposes only

6	WASHER	SK5	NICKEL
5	NUT	BRASS	NICKEL
4	INSULATION	GREY ABS	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	C00		NAME	SIGNATURE	DATE
ISSUE :	1		DRAWN	G.E.	20/11/2019
			CHK'D	P.P.	20/11/2019
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D			
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>					