

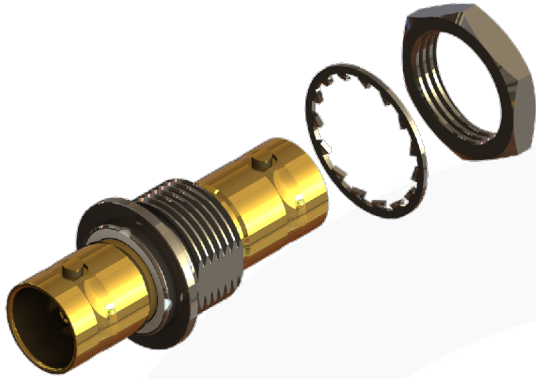


BNC INSULATED 18GHz BULKHEAD JACK TO JACK ADAPTOR

10-505-D126




images for illustration purposes only

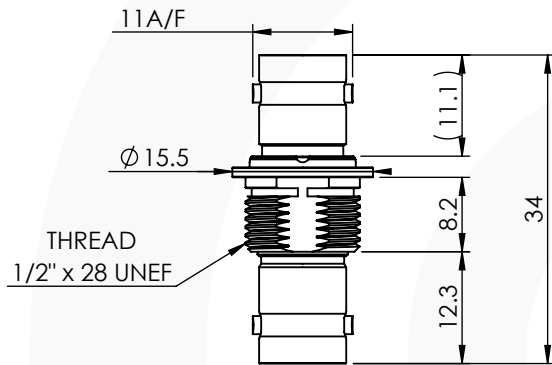

HEX 15 A/F

RECOMMENDED MOUNTING:

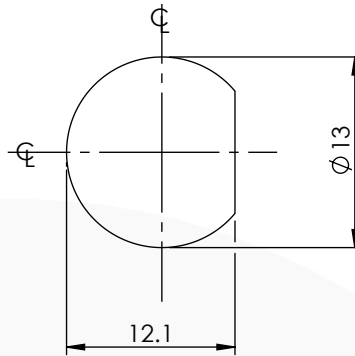

MAX PANEL THICKNESS = 4mm

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm
Frequency: 0 -18 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: N/A
Mating cycles: 500
Weight: 13.35 g

Connector Interface

image for illustration purposes only



Performance

Designed to comply with the performance requirements of BS EN 61169-63

- 32.26 dB @ 3.0 GHz
- 36.15 dB @ 6.0 GHz
- 28.08 dB @ 9.0 GHz
- 23.43 dB @ 12.0 GHz
- 26.40 dB @ 18.0 GHz

Return Loss Graph



7	WASHERS	SK5	NICKEL
6	THREADED BODY	BRASS	NICKEL
4	NUT	BRASS	NICKEL
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODIES	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	14/06/2023
		CHK'D	P.S.	14/06/2023
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.		