


BNC RIGHT ANGLED JACK TO PLUG ADAPTOR 10-520-W66



images for illustration purposes only

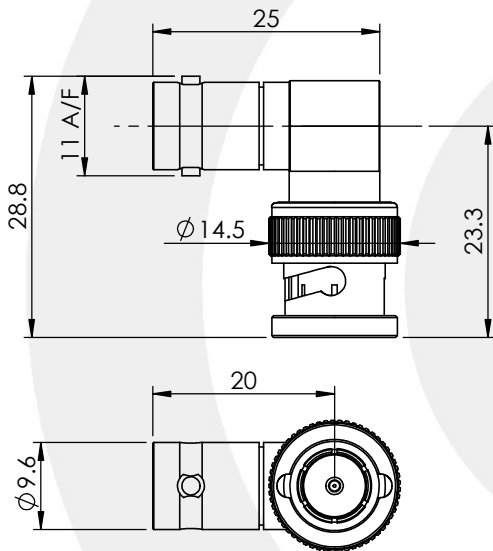

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 44

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 22 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 21.03 g

Connector Interface

image for illustration purposes only

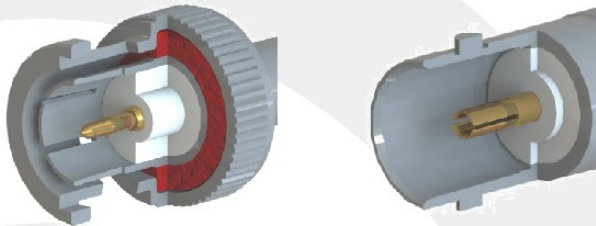

Performance


-39.61 dB @ 3.0 GHz

-17.67 dB @ 6.0 GHz

-26.00 dB @ 9.0 GHz

-10.26 dB @ 12.0 GHz

Return Loss Graph

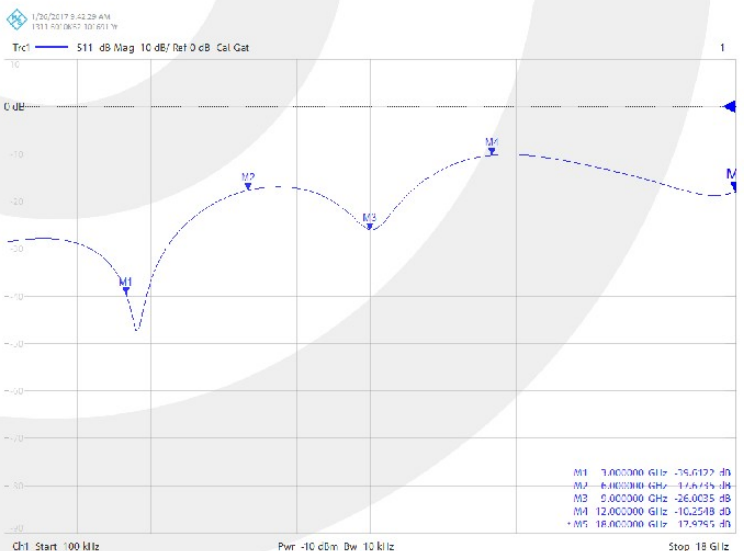

9	WASHER	BRASS	GOLD
8	END CAP	BRASS	GOLD
7	WASHER	SK5	NICKEL
6	COUPLING NUT	BRASS	BLACK NICKEL
5	GASKET	SILICONE	N/A
4	OUTER CONTACT	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODIES	BRASS	GOLD

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A05	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		DRAWN	GE
		CHK'D	IG
		APPV'D	
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			