
PRODUCT DATASHEET

TNC BULKHEAD CRIMP / CRIMP JACK


13-254-A3-AH



images for illustration purposes only

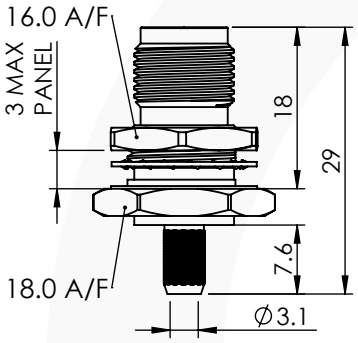

Recommended Mounting Hole

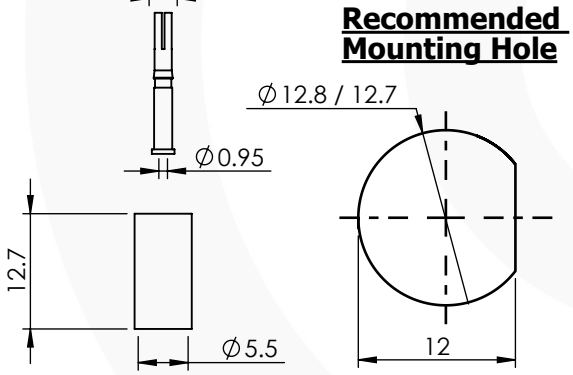

ITEM	DESCRIPTION	MATERIAL	PLATING
7	SPRING WASHER	Sk5	NICKEL
6	NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A00		NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	P.P.		10/03/2020
		CHK'D	GE		11/03/2020
		APPV'D			


6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS,WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Suitable for Cables:

(AH) RG58, RG141, LMR195, URM43, URM76, WBC195, PSF 1/6, KX15, KX23

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 96-HTS-75A or 336A

Crimp Sleeve: Hex 5.41mm A/F Tool No: 96-HTS-75A or 336A

Environmental Specification

Operating Temp: -30 to +70 Deg C.
IP Rating (Mated): IP 64

Electrical Specification

Impedance: 50 Ohm
Frequency: 0-4 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min
Cable Retention: 150 N min
Mating cycles: 250
Weight: 17.81 g

Connector Interface

image for illustration purposes only



© 2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

Model File: C:\Fusion Components Ltd\CAD Data\Solid Models\Z - Match IT SERIES\TOP LEVEL\TNC 10984
Cad File: C:\Fusion Components Ltd\CAD Data\Drawings\Z - Match IT SERIES\DATA SHEETS\13-254-A3-AH