



TNC BULKHEAD CRIMP/CRIMP JACK 13-254-B3-DB

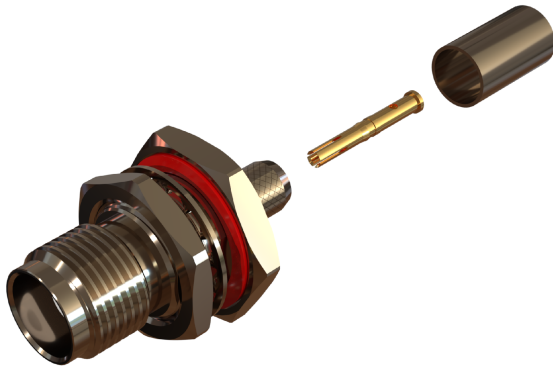


images for illustration purposes only

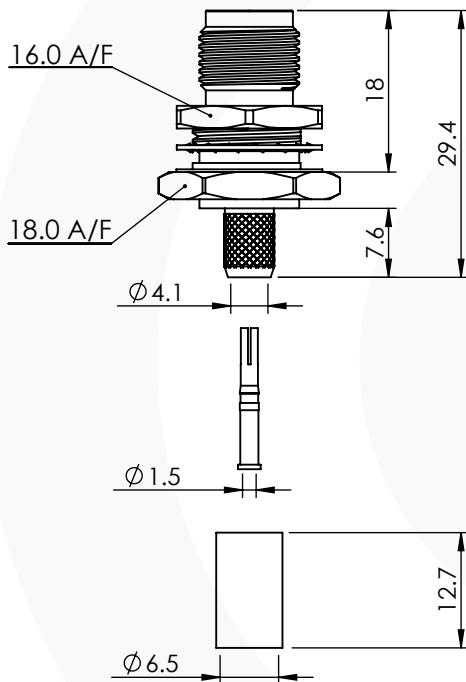

Suitable for Cables:

(DB) LMR240

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: HEX 6.48mm A/F Tool No: 336A

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min

Cable Retention: 220 N min

Mating cycles: 500


Weight: 18.47 g

Connector Interface

image for illustration purposes only



Recommended Mounting Hole

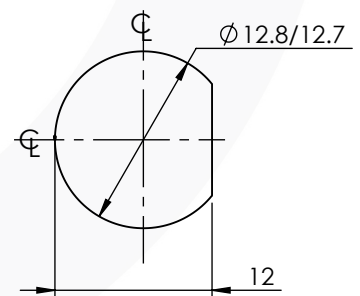

MAX. PANEL THICKNES = 3.5mm

7	SPRING WASHER	PHOS. BRONZE	NICKEL
6	NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4

SHEET 1 OF 1

DIMENSIONS ARE IN MILLIMETRES

REVISION : A00

NAME SIGNATURE DATE

ISSUE : 1

DRAWN G.E. 23/07/2026

CHK'D P.S. 23/07/2026

APPV'D

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS
SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL
GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT
TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR
NOTICE.