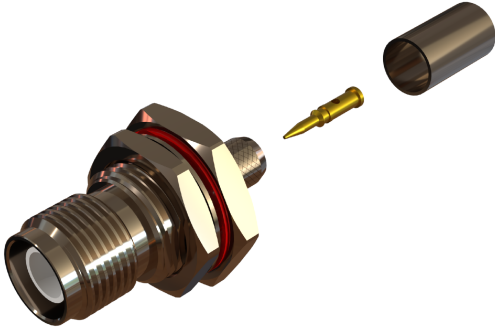
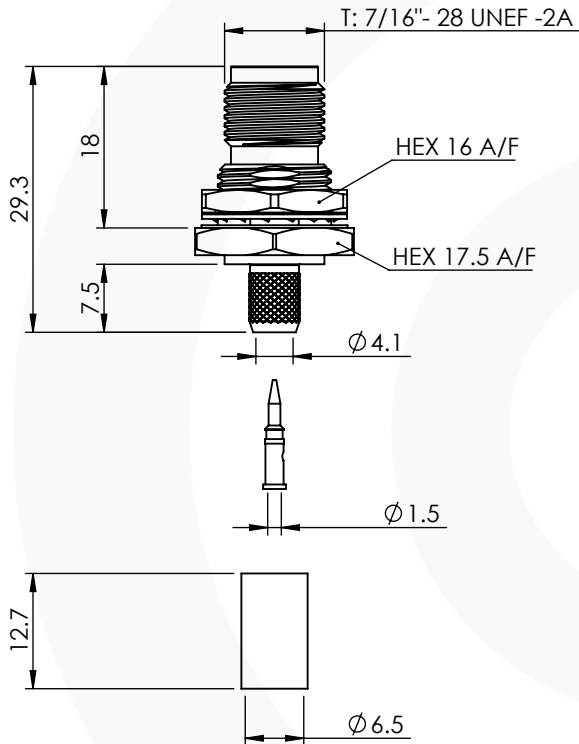



**TNC REVERSE POLARITY
BULKHEAD CRIMP/CRIMP
JACK****14-254-A3-DB**

images for illustration purposes only

**Suitable for Cables:**

(DB) LMR240

Stripping Dimensions

a = 4 mm
b = 8 mm
c = 16 mm
d = 12 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001**Tooling**

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: HEX 6.48mm A/F Tool No: 336A

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min



Cable Retention: 220 N min

Mating cycles: 500

Weight: g

Connector Interface

image for illustration purposes only

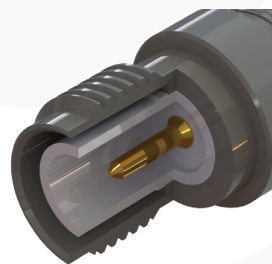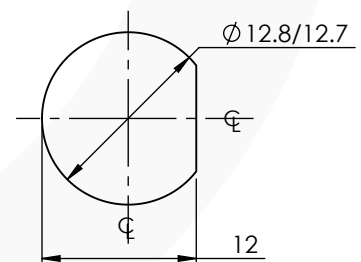**Recommended
Mounting Hole**

MAX. PANEL THICKNES = 3.5mm

8	BODY	BRASS	NICKEL
7	CRIMP SLEEVE	BRASS	NICKEL
6	CONTACT	BRASS	GOLD
5	INSULATOR	DELFIN	N/A
4	RETAINER	BRASS	NICKEL
3	GASKET	RUBBER	N/A
2	NUT	BRASS	NICKEL
1	LOCK WASHER	SK5	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	23/07/2026
		CHK'D	P.S.	23/07/2026
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				