


## N TYPE BULKHEAD CRIMP/CRIMP JACK 25-255-B3-AD




images for illustration purposes only

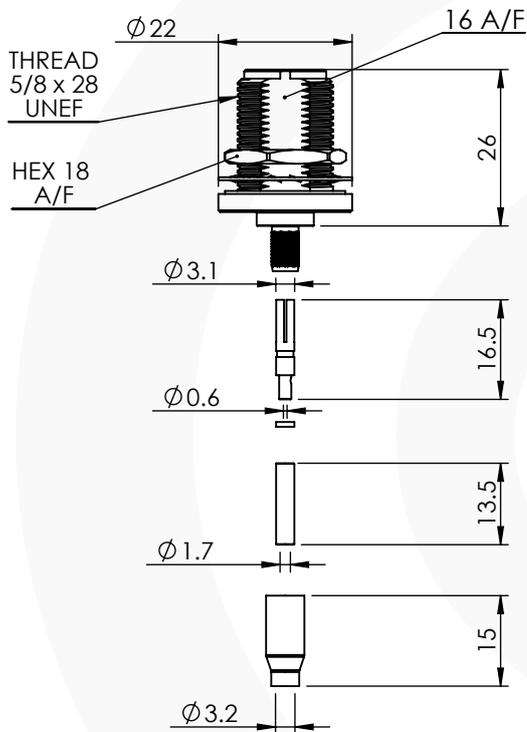

### Suitable for Cables:

(AD) RG316, RG174, RG188, LMR100, WBC100, URM95, KX3, KX22

### Stripping Dimensions



a = 4.0 mm  
b = 10.0 mm  
c = 18.5 mm  
d = 14.5 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure: AP036

### Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336G

Crimp Sleeve: Hex 5.41mm A/F Tool No: 336G

Alignment Tool: Not Applicable Extraction: Not Applicable

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 67

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 250

Weight: 35.60 g


### Connector Interface

image for illustration purposes only



### Recommended Mounting

MAXIMUM PANEL THICKNESS: 6.5mm

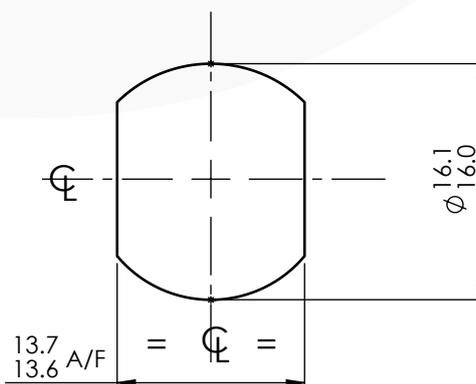

7	SPRING WASHER	STAINLESS STEEL	NICKEL
6	PUSHER SLEEVE	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY & NUT	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b> SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	C00	NAME	SIGNATURE	DATE
DRAWN	IG			03/05/2012
ISSUE :	2	CHK'D	GE	10/05/2012
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D		
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				