



N TYPE B/H SOLDER / SOLDER JACK

25-267-2-B3-HA

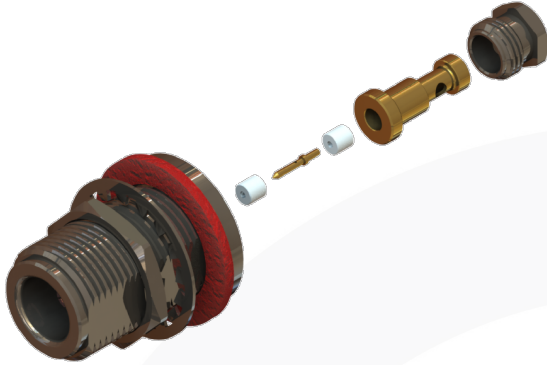


images for illustration purposes only

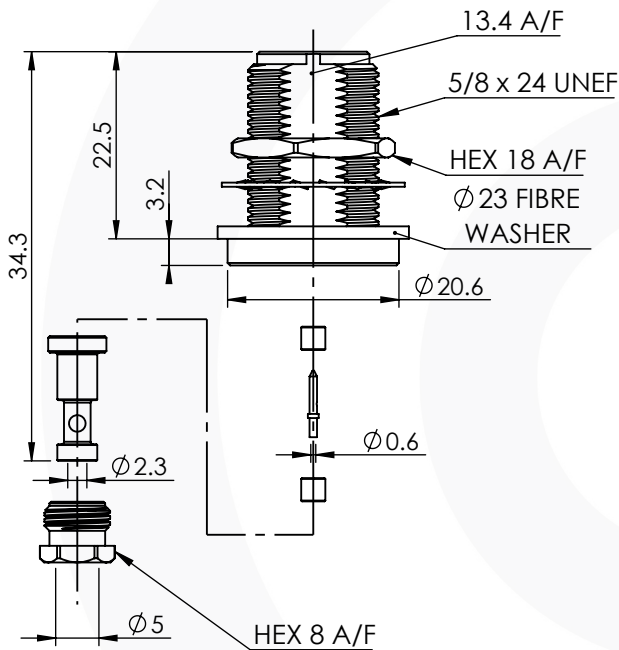

Suitable for Cables:


(HA) RG405 (0.085"), UT85

Stripping Dimensions



a = 5.0 mm

RECOMMENDED MOUNTING:

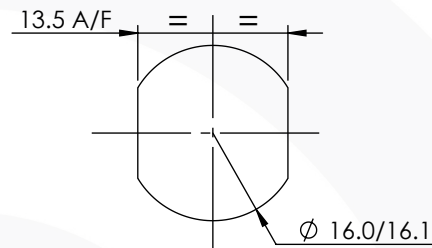

Environmental Specification

Operating Temp: -65 to +155 Deg C.

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 40.10 g

Connector Interface

image for illustration purposes only



Performance

-35.45 dB @ 3.0 GHz


-44.83 dB @ 6.0 GHz

-31.71 dB @ 9.0 GHz

-42.18 dB @ 12.0GHz

-17.06 dB @ 18.0GHz

Return Loss Graph

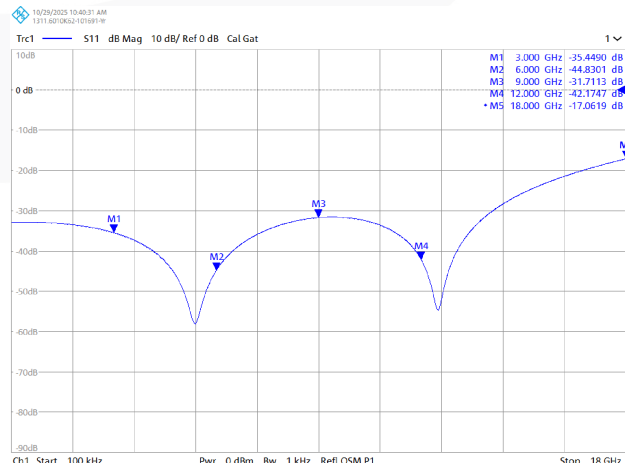

8	FIBRE WASHER	RED FIBRE	N/A
7	LOCK WASHER	STAINLESS STEEL	PASSIVATED
6	NUT	BRASS	NICKEL
5	CLAMP NUT	BRASS	NICKEL
4	SOLDER SLEEVE	BRASS	GOLD
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	G.E.	27/11/2020
		CHK'D	P.S.	27/11/2020
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				