

PRODUCT DATASHEET


N TYPE 4 HOLE FLANGE PLUG WITH SOLDER TAG

25-372-1-B3




images for illustration purposes only

2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD FARRY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT



6	GASKET		SILICONE		N/A	
5	CONTACT		BRASS		GOLD	
4	INSULATORS		PTFE		N/A	
3	RETAINING RING		PHOSPHER BRONZE		N/A	
2	COUPLING NUT		BRASS		NICKEL	
1	BODY		BRASS		NICKEL	
ITEM	DESCRIPTION		MATERIAL		PLATING	
Α4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES			
REVISION: A01			NAME	SIGNATURE		DATE
		DRAWN	G.E.			06/08/2021
ISSUE	: 1	CHK'D	P.S.			06/08/2021
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D				
		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				

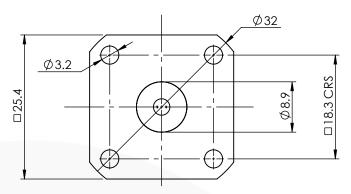

FLANGE MOUNTING HOLES

Tooling

Centre Contact: Solder Tool No: Solder

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification Mechanical Specification

Impedance: 50 Ohm Contact Retention: 27 N min Frequency: 0 - 11 GHz Cable Retention: N/A

Dielectric W/V: 1000 Veff Mating cycles: 500 Insulation res: 5000 M-Ohm Weight: 29.5 g

Connector Interface

image for illustration purposes only



Tel: +44(0)20 8538 9090 Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com