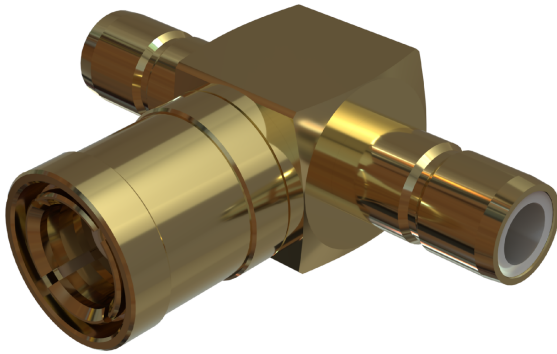
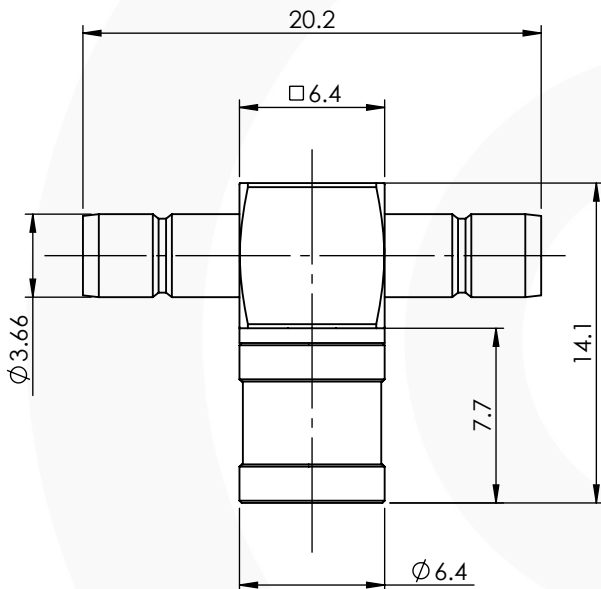


**SMB TEE ADAPTOR.
JACK - PLUG - JACK****32-523-D3**

images for illustration purposes only

**Environmental Specification**

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-4 GHz

Dielectric W/V: 500 Veff

Insulation res: 1000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min



Cable Retention: Not Applicable

Mating cycles: 500

Weight: 3.55 g

Connector Interface

image for illustration purposes only



7	FEMALE CONTACT	BERYLLIUM COPPER	GOLD
6	COVER	BRASS	GOLD
5	RESILIENT RING	BERYLLIUM COPPER	GOLD
4	OUTER CONTACT	BRASS	GOLD
3	INSULATORS	PTFE	N/A
2	MALE CONTACT	BRASS	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4

SHEET 1 OF 1

DIMENSIONS ARE IN MILLIMETRES

REVISION :

A00

NAME

SIGNATURE

DATE

ISSUE :

1

DRAWN

G.E.

09/07/2026

CHK'D

P.S.

09/07/2026

APPV'D

**6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR**

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS
SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL
GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT
TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR
NOTICE.