


PRODUCT DATASHEET

1.0/2.3 SCREW LOCK CRIMP/CRIMP PLUG 52-005A-B66-FB



images for illustration purposes only

THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

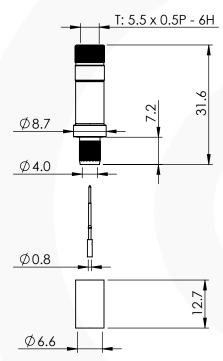

DIN1.0/2.3 Screw Lock Design to prevent signal loss in vibrating environments as recommended by CoaXPress


į	8	REAR BODY		BRASS		NICKEL	
	7	OUTER CONTACT		BERYLLIUM COPPER		GOLD	
	6	CENTRE CONTACT		PHOSPHOR. BRONZE		GOLD	
)	5	SPRING		STAINLESS STEEL		NICKEL	
)	4	CRIMP SLEEVE		BRASS		NICKEL	
	3	BODY		BRASS		NICKEL	
)	2	INSULATOR		PTFE		N/A	
)	1	COUPLING NUT		BRASS		NICKEL	
i	ITEM	DESCRIPTION		MATERIAL		PLATING	
	Α4	SHEET 1 OF 1	/	DIMENSI	ONS ARE	IN MILLIN	METRES
	REVISION: BOO		RoHS 2002/95/EC	NAME	SIGNATURE		DATE
			DRAWN	I IG			17/05/2019
	ISSUE	: 2	CHK'D	GE			18/05/2019
2	6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX.		APPV'E				
			THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT				

TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR

Suitable for Cables:

(FB) Belden 1505A, Draka 0.8/3.7 A/F, Image 720, Bryant BD SD05A, Conducfil 14472, Percon VK6, VK66

Stripping Dimensions



a = 4.0 mm

*b = 8.0 mm

c = 16.0 mm

d = 12.0 mm

* STRIP FOIL SCREEN TO DIM "b"

Assembly Procedure: AP001

<u>Tooling</u>

Centre Contact: Indent or SQ 0.95mm A/F Tool No: 96-HTS-76

Crimp Sleeve: HEX 6.48mm A/F Tool No: 96-HTS-76

Alignment Tool: 100-1023 Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 750 Veff
Insulation res: 5000 M-Oh

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min Cable Retention: 150 N min

Mating cycles: 500 Weight: 8.45 g

Connector Interface



Tel: +44(0)20 8538 9090

TW1 4JR

Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com