

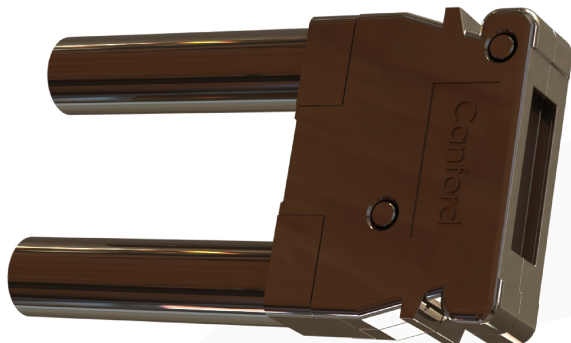


MM U LINK

64-564-D126

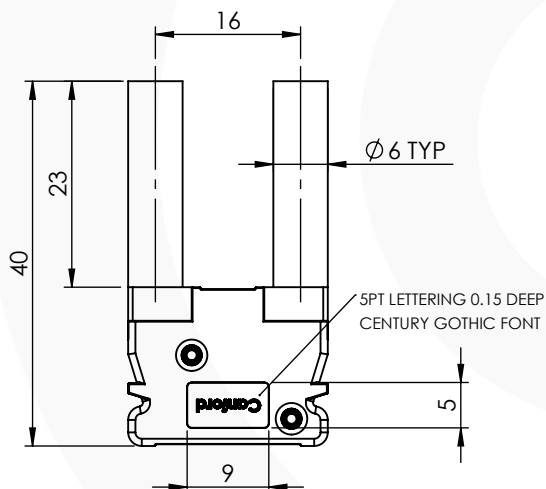

images for illustration purposes only



Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): N/A

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A N min

Mating cycles: 5000

Weight: 21.64 g

Connector Interface

image for illustration purposes only



Performance

-33.50 dB @ 3.0 GHz

-22.70 dB @ 6.0 GHz

-18.19 dB @ 9.0 GHz

-11.73 dB @ 12.0GHz

Return Loss Graph



6	REAR BODY	ZINC	NICKEL
5	OUTER CONTACT	PHOSPHOR BRONZE	NICKEL
4	SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	FRONT BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION : H00		NAME	SIGNATURE
ISSUE : 1		DRAWN	IG
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		CHK'D	GE
		APPV'D	
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			