



MICRO BNC STRAIGHT BULKHEAD JACK

67-254-B66-BI

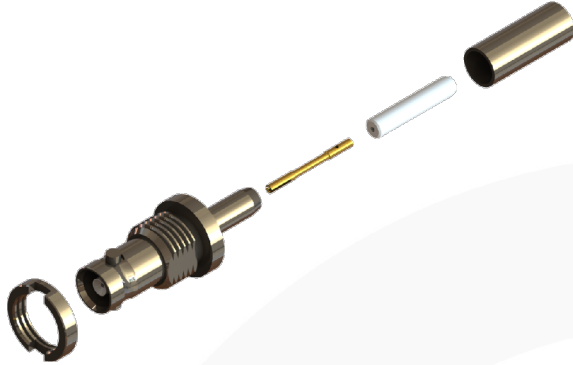


images for illustration purposes only

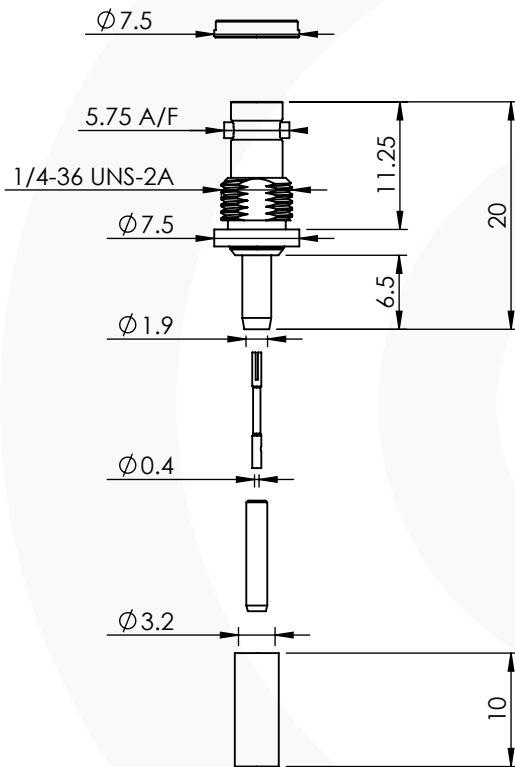

Suitable for Cables:

(BI) 1.6mm Dia Micro Coax

Stripping Dimensions



- a = 3.0 mm
- b = 9.0 mm
- c = 13.0 mm
- d = 10.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP005

Tooling

Centre Contact: Solder

Tool No: Solder

Crimp Sleeve: Hex 3.25mm A/F

Tool No: HTS-43

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-4 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 60 N min

Mating cycles: 500


Weight: 2.35 g

Connector Interface

image for illustration purposes only



Recommended Mounting:

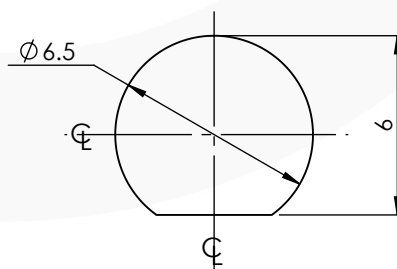

MAX PANEL THICKNESS = 3mm

6	PUSHER SLEEVE	PTFE	N/A
5	CRIMP SLEEVE	BRASS	NICKEL
4	INSULATOR	PTFE	N/A
3	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
2	REAR BODY	BRASS	NICKEL
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	31/07/2023
		CHK'D	P.S.	31/07/2023
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				