



MICRO BNC 12G REAR MOUNT INSULATED BULKHEAD CRIMP/CRIMP JACK 67-258-D126-AB

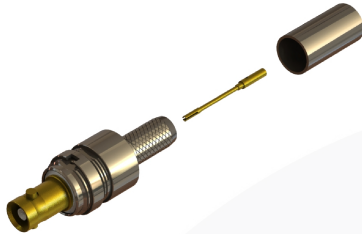


images for illustration purposes only

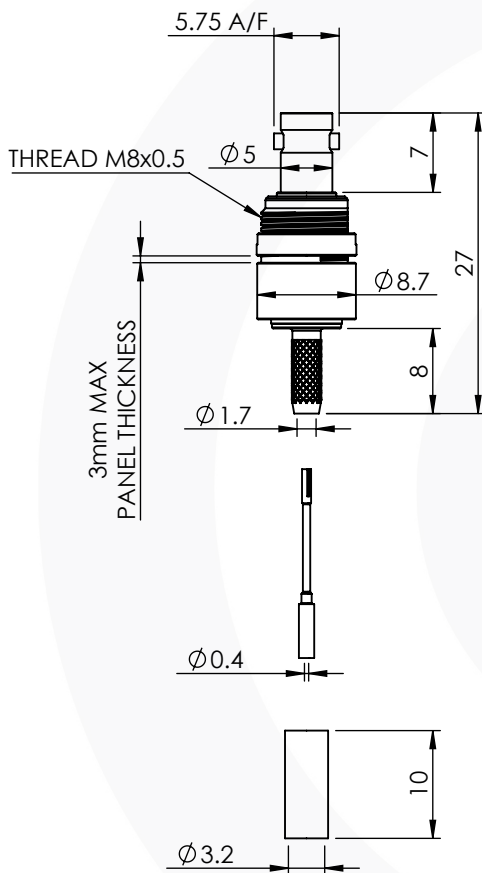

Suitable for Cables:

(AB) RG179, RG187, Belden 179DT

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: Indent or SQ 0.95mm A/F Tool No:96-HTS-43

Crimp Sleeve: Hex 3.25mm A/F Tool No:96-HTS-43

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 500


Weight: 4.39 g

Connector Interface

image for illustration purposes only



Recommended Mounting:

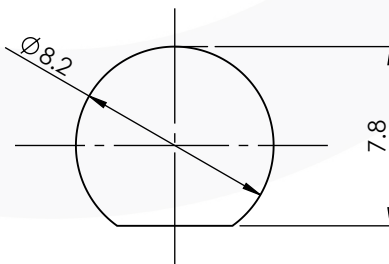

5	CRIMP SLEEVE	BRASS	NICKEL
4	INSULATOR	PTFE	N/A
3	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
2	REAR BODY	BRASS	NICKEL
1	FRONT BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION : B00		NAME	SIGNATURE
ISSUE : 1		DATE	
DRAWN		IG	30/04/2019
CHK'D		GE	01/05/2019
APPV'D			
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			