



2 WAY MM TO BNC MOULDED BLOCK

74-1064-544-B126-3

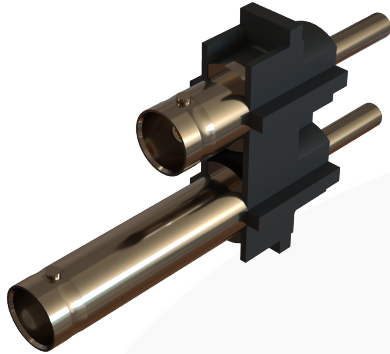

images for illustration purposes only

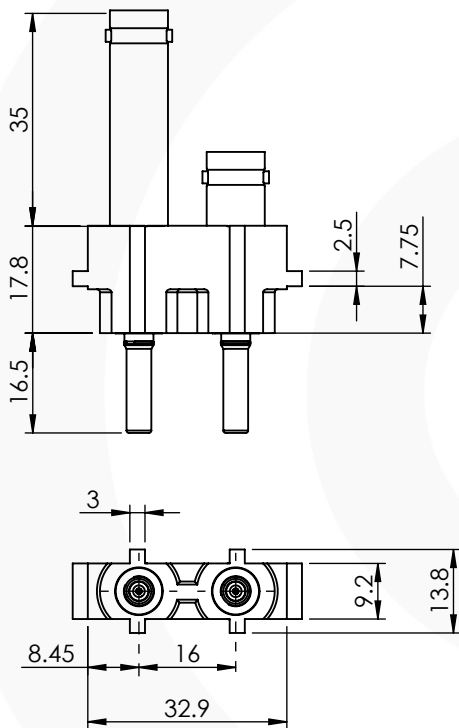

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): N/A

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A

Mating cycles: 5000


Weight: 32.33 g

Connector Interface


image for illustration purposes only

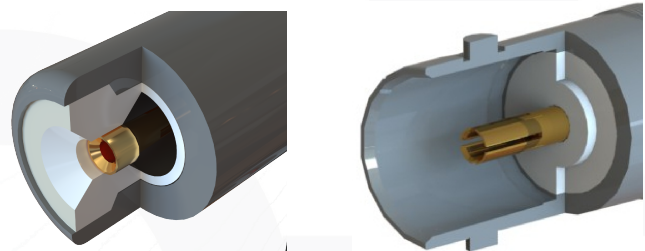

Return Loss Graph (Short Port)

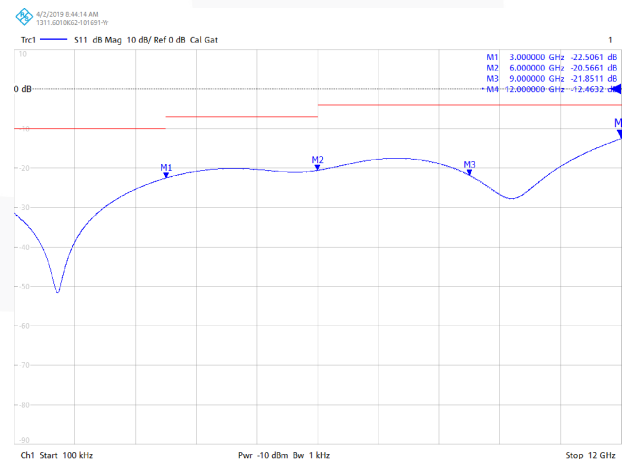

Return Loss Graph (Long Port)

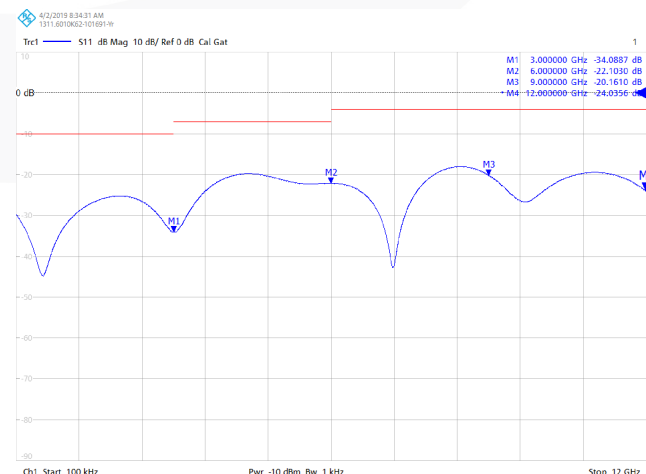

5	BLOCK	POM	N/A
4	C CLIP	STAINLESS STEEL	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION : C00		NAME	SIGNATURE
ISSUE : 1		DRAWN	IG
		CHK'D	GE
		APPV'D	
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			