


## TNC PLUG TO FME PLUG ADAPTOR

### 74-2213-514



images for illustration purposes only

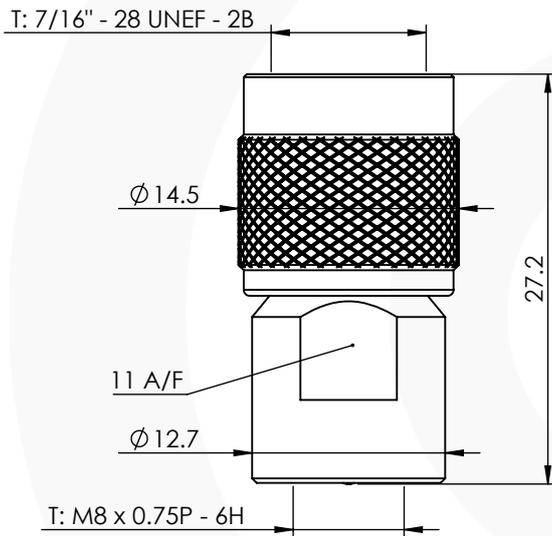

GENERAL TOLERANCE : ±0.2mm

### Environmental Specification

Operating Temp: -40 to +100 Deg C.

IP Rating (Mated): IP 41

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-2 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min



Cable Retention: Not Applicable

Mating cycles: 500

Weight: g

### Connector Interface

image for illustration purposes only



8	COUPLING NUT	BRASS	NICKEL
7	WASHER	Fe	NICKEL
6	RETAINING WASHER	SK5	NICKEL
5	SPACER	POM	N/A
4	GASKETS	SILICONE	N/A
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	03/03/2026
		CHK'D	P.S.	03/03/2026
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				