




MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK 2 WAY 92-67-468-2-B126

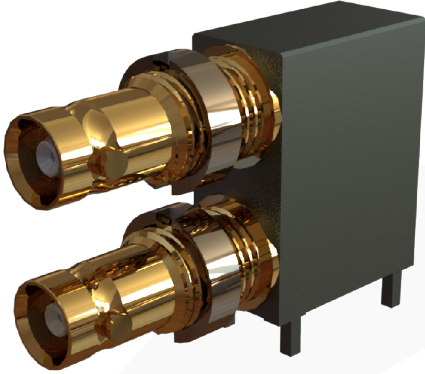

images for illustration purposes only

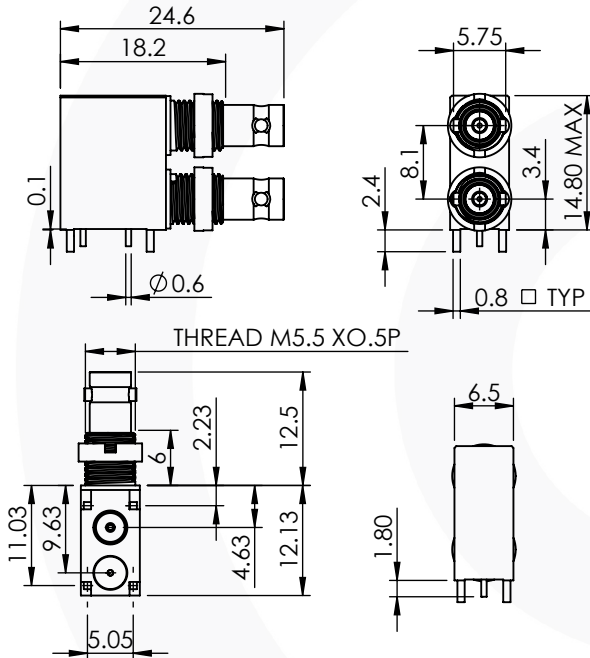

Recommended PCB Layout

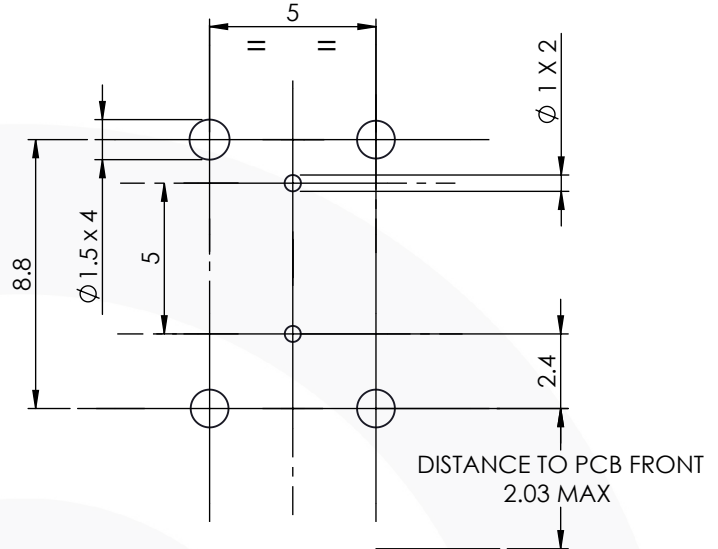

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 20 N min


Cable Retention: Not Applicable

Mating cycles: 500


Weight: 10.80 g

Connector Interface

image for illustration purposes only



Recommended Mounting Hole

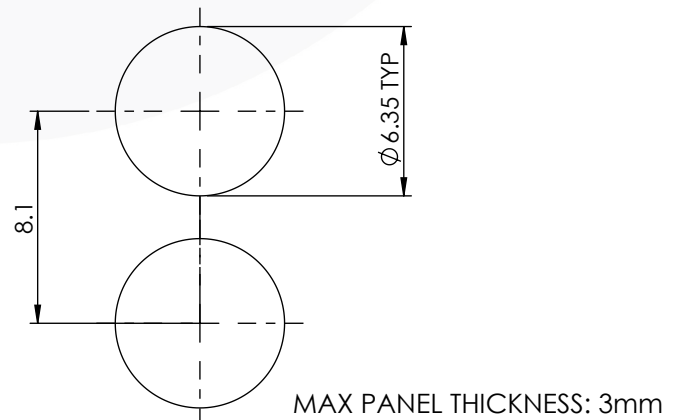

5	REAR BODY	BRASS	TIN
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	FRONT BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION : C02		NAME	SIGNATURE
ISSUE : 2		DATE	
DRAWN		IG	21/09/2016
CHK'D		GE	22/09/2016
APPV'D			
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR			
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			