



## TNC RIGHT ANGLE BULKHEAD SEALED PCB JACK


### 13-468-1-B3

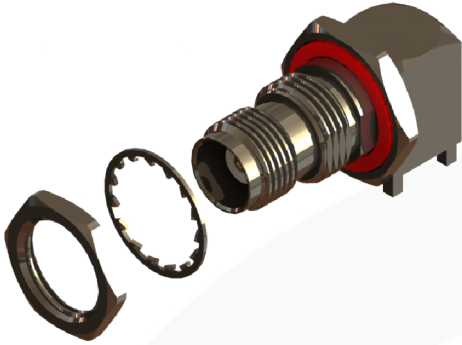


images for illustration purposes only

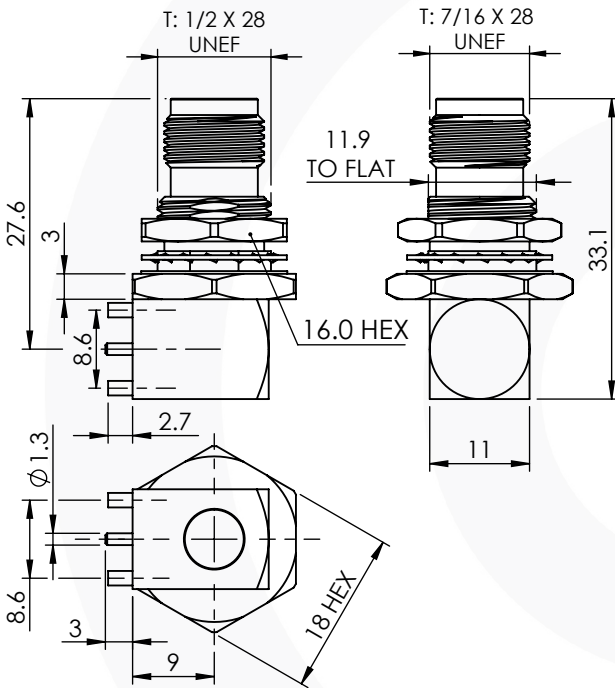

### Recommended Mounting Hole

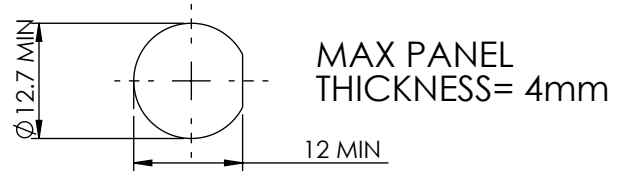

### Recommended PCB Layout

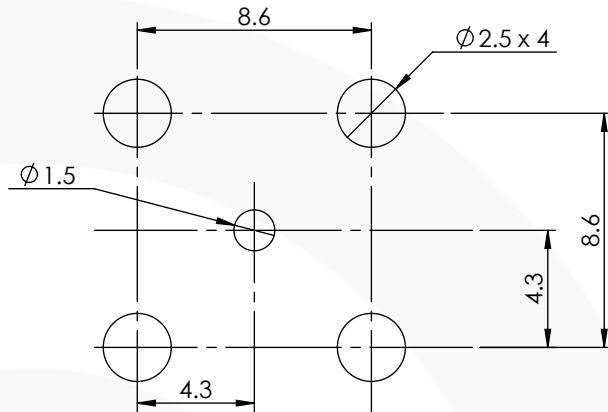

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Unmated): IP 68

### Electrical Specification

Impedance: 50 Ohm  
Frequency: 0-3 GHz  
Dielectric W/V: 1500 Veff  
Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min  
Cable Retention: N/A  
Mating cycles: 250  
Weight: 32.29 g

### Connector Interface

image for illustration purposes only



8	POTTING	STYCAST EPOXY	N/A
7	WASHER	SK5	NICKEL
6	NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	FRONT BODY	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	REAR BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	16/09/2015
		CHK'D	GE	17/09/2015
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				