



## BNC FRONT MOUNT IP68 BULKHEAD JACK to 10-32 JACK ADAPTER

### 74-1054-540-Q3

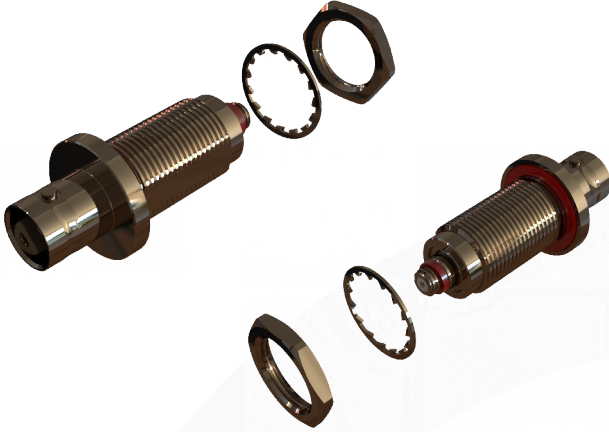

images for illustration purposes only

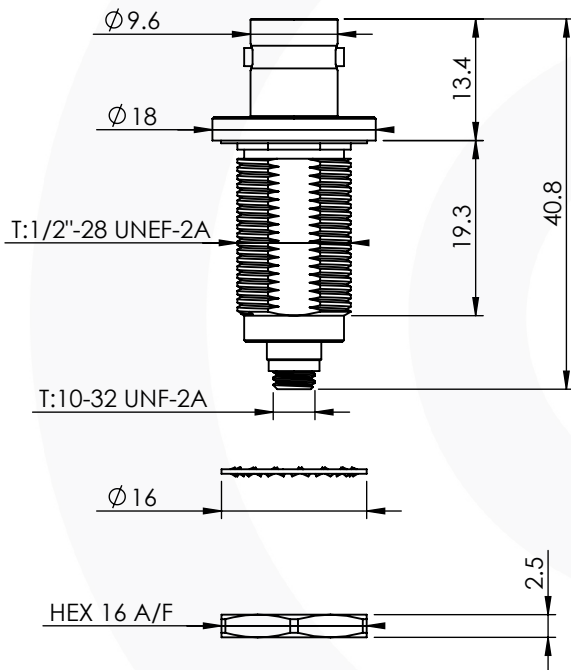

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Mated): IP 68 (75m - 24Hr)

### Electrical Specification

Impedance: 50 Ohm  
Frequency: 0-3 GHz  
Dielectric W/V: 750 Veff  
Insulation res: 1000 M-Ohm

### Mechanical Specification


Contact Retention: 10 N min  
Cable Retention: Not Applicable  
Mating cycles: 500  
Weight: 26.65 g

### Connector Interface

image for illustration purposes only



### Recommended Mounting

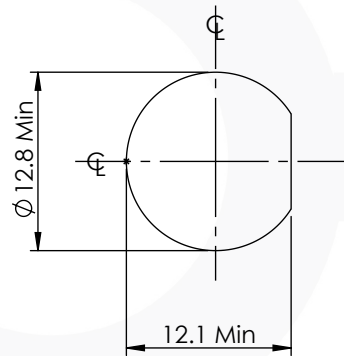

Max Panel Thickness:  
14mm

6	WASHERS	SK5	WHITE BRONZE
5	NUT	BRASS	WHITE BRONZE
4	GASKETS	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODIES	BRASS	WHITE BRONZE
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	30/10/2023
		CHK'D	P.S.	30/10/2023
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				