



## BNC RIGHT ANGLED JACK TO PLUG ADAPTOR

### 10-520-W66

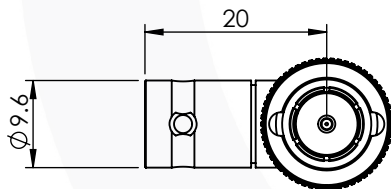

images for illustration purposes only

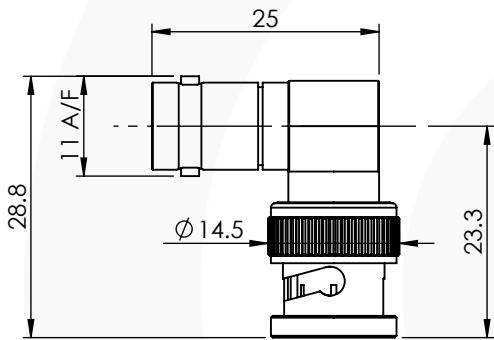

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 44

### Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 22 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 21.03 g

### Connector Interface

image for illustration purposes only

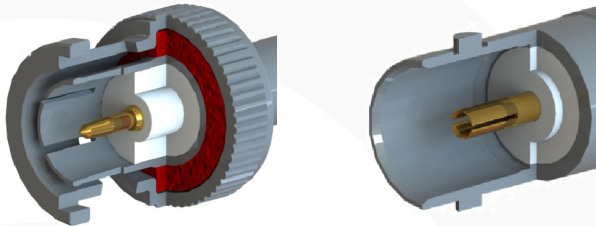

### Performance


-39.61 dB @ 3.0 GHz

-17.67 dB @ 6.0 GHz

-26.00 dB @ 9.0 GHz

-10.26 dB @ 12.0 GHz

### Return Loss Graph

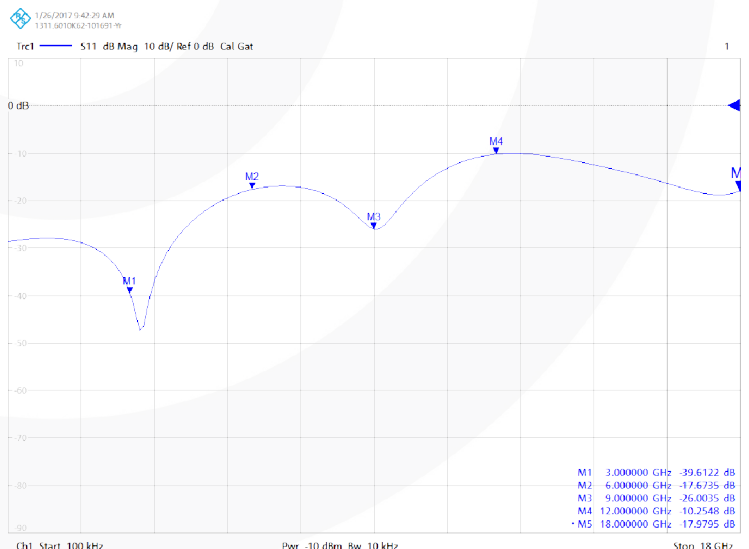

9	WASHER	BRASS	GOLD
8	END CAP	BRASS	GOLD
7	WASHER	SK5	NICKEL
6	COUPLING NUT	BRASS	BLACK NICKEL
5	GASKET	SILICONE	N/A
4	OUTER CONTACT	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODIES	BRASS	GOLD

ITEM	DESCRIPTION	MATERIAL	PLATING
<b>A4</b>	SHEET 1 OF 1		
DIMENSIONS ARE IN MILLIMETRES			
REVISION :	A04	NAME	SIGNATURE
ISSUE :	3	DATE	
DRAWN		GE	19/11/2013
CHK'D		IG	19/11/2013
APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>			