


## N TYPE RIGHT ANGLE SOLDER/CRIMP PLUG

### 25-105-Y3-AH




images for illustration purposes only

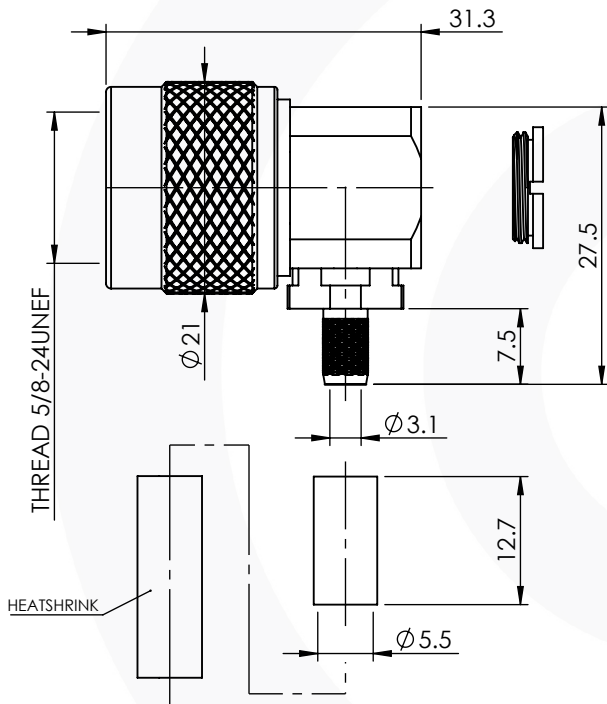

### Suitable for Cables:

(AH) RG58, RG141, LMR195, URM43, URM76, WBC195, PSF 1/6, KX15, KX23

### Stripping Dimensions



a = 4.5 mm  
b = 10.0 mm  
c = 23.0 mm  
d = 18.5 mm

### Assembly Procedure: AP017

### Tooling

Centre Contact: Solder Tool No: Solder

Crimp Sleeve: Hex 5.41mm A/F Tool No: 336A

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 54

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-2 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 100 N min

Mating cycles: 500

Weight: 50.89g

### Connector Interface

image for illustration purposes only



9	CRIMP SLEEVE	BRASS	NICKEL
8	HEATSHRINK	POLYOLEFIN	N/A
7	COUPLING NUT	BRASS	BLACK NICKEL
6	RETAINING RING	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	SCREW	BRASS	BLACK NICKEL
3	CONTACT	BRASS	GOLD
2	INSULATOR	PTFE	N/A
1	BODY	BRASS	BLACK NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	25/04/2024
		CHK'D	P.S.	25/04/2024
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				